

## Shower thermostat for wall installation - Brushed Chrome

SERIES-VARIOUS












34 443 979 Product version from 5/1/2022



- 3/8" shower outlet
- slide-on rosettes Ø 70 mm
- 1/2" connection
- gauge 150 mm - 13 mm
- with volume control
- WRAS

**Intrinsic protection against back flow.**

Intrinsic protection against back flow.

	Brushed Chrome	34 443 979-93
	Chrome	34 443 979-00
	Brushed Platinum	34 443 979-06
	Platinum	34 443 979-08
	Dark Chrome	34 443 979-19
	Brushed Durabronze (23kt Gold)	34 443 979-28
	Matte Black	34 443 979-33
	Brushed Dark Brass	34 443 979-39
	Brushed Champagne (22kt Gold)	34 443 979-46
	Champagne (22kt Gold)	34 443 979-47
	Brushed Dark Platinum	34 443 979-99

### Required miscellaneous



**Concealed adapter -**

- please order two adapters (USA only)

35 080 970-90  
0010

### Required miscellaneous



**TARA Regulator handle - Brushed Chrome** 11 431 892-93

34 443 979 Product version from 5/1/2022

mm [inches]



Flow rate chart



#### Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Shower thermostat for wall installation - Brushed Chrome


SERIES-VARIOUS

34 443 979 Product version from 5/1/2022

### Certificates and sustainability

Belgaqua\_22\_281\_2 LGA\_29

WRAS\_2204

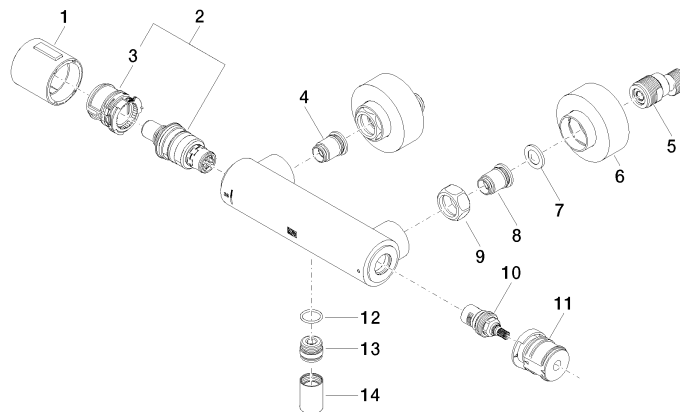

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	04 31 20 530 00 90	insert	1.00	2
3	90 30 40 010 00 90	regulator	1.00	2
1	90 17 33 015 00-93	handle	1.00	20
11	90 30 40 017 00 90	base	1.00	2
5	04 11 04 030 00 90	connection	2.00	2
13	09 31 20 511-93	nipple	1.00	20
6	90 31 20 512 00-93	rosette	2.00	20
10	90 90 03 236 00 90	top	1.00	2
8	04 31 20 540 00 90	insert	1.00	2
9	09 24 77 008-00	nut	2.00	10
2	90 15 02 070 00 90	cartridge	1.00	2
7	09 29 30 050 90	sieve	2.00	2
14	90 21 02 069 00-93	cover	1.00	20
12	90 14 10 010 00 90	seal	1.00	2