

Concealed wall mounting -

35 003 970



- red brass, lead-free
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- dust cover
- anti-water packing
- soundproofing

for 36 804 661-FF

Recommended miscellaneous

Extension 25 mm -


12 179 970 90



Concealed wall mounting -


35 003 970

mm [inches]

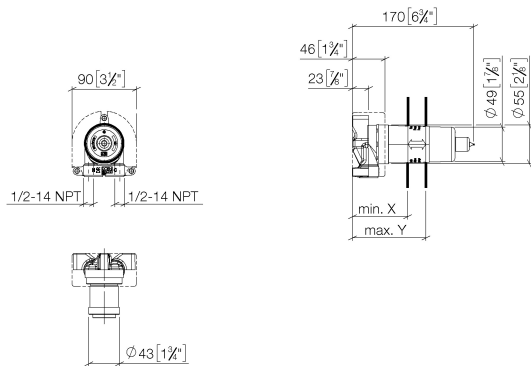

| | with item | min. X | max. Y |
|---|-----------|-------------|--------------|
| 36013970-FF;36013660-FF;36045970-FF;36045660-FF | | 90 [3 1/2"] | 113 [4 1/2"] |
| 36804661-FF | | 78 [3 1/8"] | 103 [4"] |

Flow rate chart

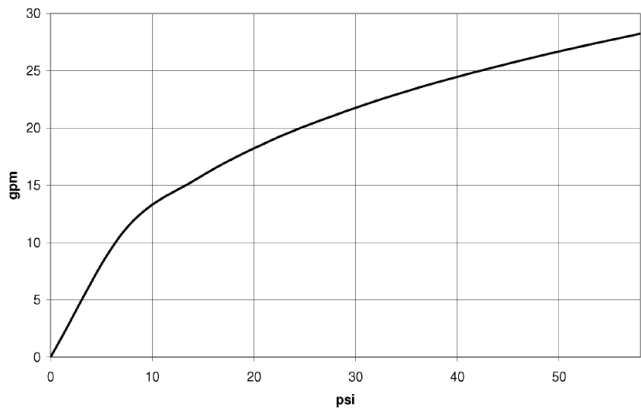

Codes & Standards

ASME
A112.18.1/CSA
B125.1



Concealed wall mounting -


35 003 970

Certificates

IAPMO_N-4976 (2). IAPMO_4976 (3). IAPMO_6397 (1).

Concealed wall mounting -

35 003 970

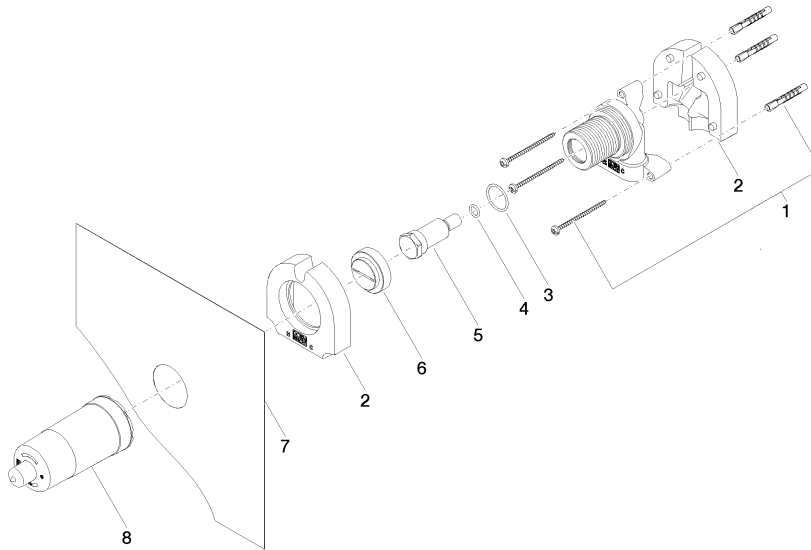

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|-------------|---------------|---------------|
| 1 | 05 30 31 029 00 90 | fixing set | 1 | 2 |
| 2 | 09 11 11 019 90 | accessories | 2 | 2 |
| 3 | 09 14 10 112 90 | seal | 1 | 2 |
| 4 | 09 14 10 139 90 | seal | 1 | 2 |
| 5 | 09 31 20 038 90 | plug | 1 | 2 |
| 6 | 09 20 97 010 90 | cap | 1 | 2 |
| 7 | 04 14 03 079 00 90 | gasket kit | 1 | 2 |
| 8 | 09 21 02 178 90 | cap | 1 | 2 |