





- red brass, lead-free
- 1x male 1/2" connector
- 2x female thread 1/2" outlet
- cut-to-length spindle and sleeve
- dust cover
- anti-water packing
- soundproofing

NOTE: Important for certain series!
Due to minimum rough-in requirements, a framing
of 2x6 studs is needed.

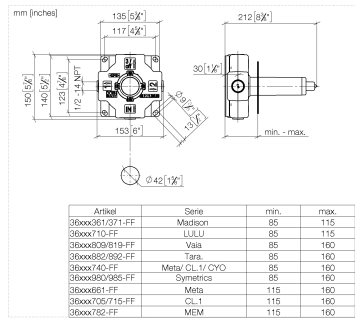

Artikel	Serie	min.	max.
36xxx361/371-FF	Madison	85	115
36xxx710-FF	LULLI	85	115
36xxx36815-FF	Villa	85	160
36xxx652/652-FF	Tara	85	160
36xxx740-FF	Meta/ CL 1/ CYO	85	160
36xxx620/625-FF	Symetrics	85	160
36xxx661-FF	Meta	115	160
36xxx705/715-FF	CL 1	115	160
36xxx752-FF	MEM	115	160




Codes & Standards

ASME A112.18.1
cUPC

Certificates and sustainability

IAPMO_4976 (

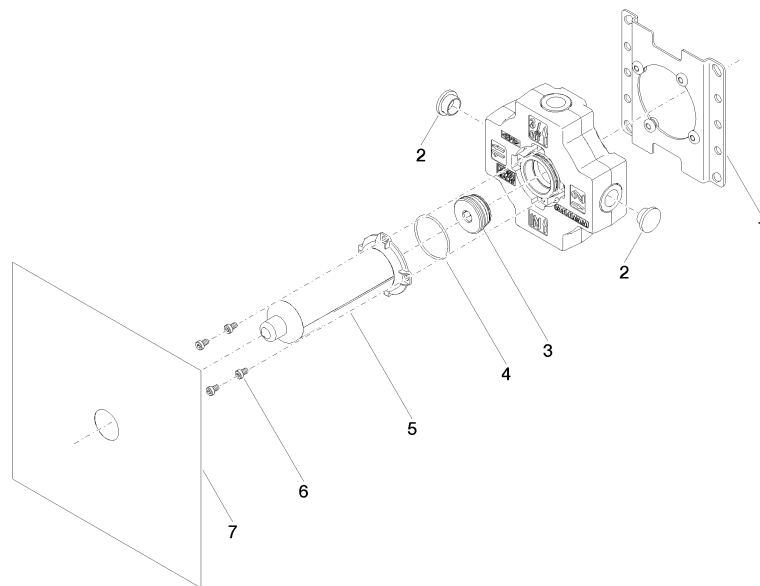

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	90 31 20 131 00 90	plug	1.00	2
7	04 14 03 116 00 90	gasket kit	1.00	2
2	09 31 20 092 90	plug	4.00	2
6	09 30 30 112 90	screw	4.00	2
4	09 14 10 210 90	seal	1.00	2
5	04 21 02 180 10 90	cap	1.00	2
1	04 17 20 252 00 90	base	1.00	60