


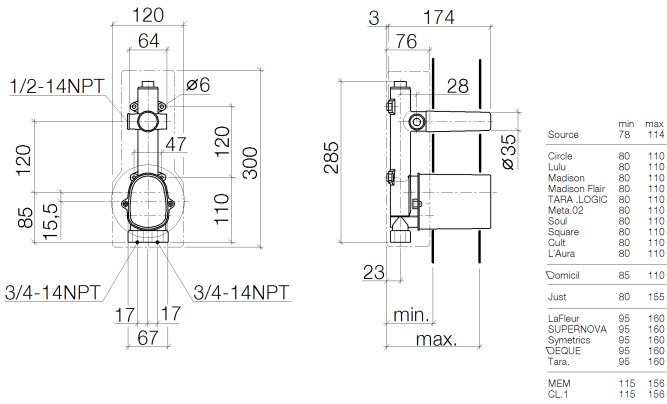


- red brass, lead-free
- 2x back flow preventer
- pre-seal
- 3/4" (cold/hot) connection
- 1x female thread 1/2" outlet, left/right/top alternatively
- thermostat cartridge
- head part with cut-to-length spindle and sleeve
- 2x dust cover
- 2x anti-water packing
- soundproofing
- gauge 120 mm

NOTE: Important for certain series!
 Due to minimum rough-in requirements, a framing of 2x6 studs is needed.

| Recommended miscellaneous | | Recommended miscellaneous | |
|-----------------------------------------------------------------------------------|--------------------------|---------------------------|---------------|
|  | Extension 28 mm - | Extension 46 mm - | |
| | 12 177 970 90 | | 12 178 970 90 |

35 437 970 Product version up to 5/12/2021




Codes & Standards

ASME A112.18.1 cUPC

Certificates and sustainability

IAPMO_4976 (

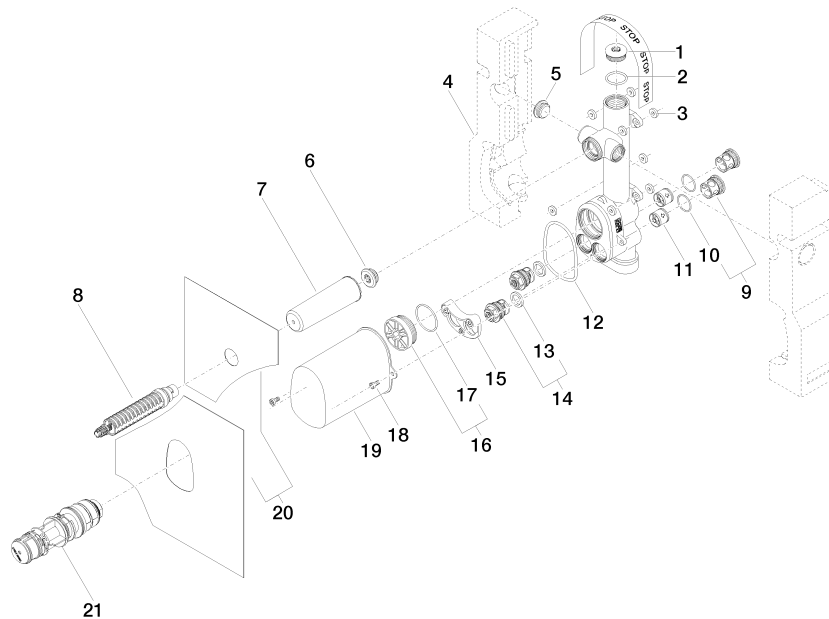

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|-----------------------|---------------------|---------------|---------------|
| | 2 09 14 10 009 90 | seal | 1.00 | 2 |
| | 19 09 21 02 103 90 | cap | 1.00 | 2 |
| | 16 04 31 20 100 00 90 | plug | 1.00 | 2 |
| | 3 04 14 05 045 00 90 | set | 8.00 | 2 |
| | 8 90 90 03 143 00 90 | top | 1.00 | 2 |
| | 12 09 14 10 189 90 | seal | 1.00 | 2 |
| | 14 90 29 05 031 00 90 | insert | 2.00 | 2 |
| | 17 09 14 10 111 90 | seal | 1.00 | 2 |
| | 4 09 11 11 021 90 | accessories | 1.00 | 2 |
| | 6 04 31 20 006 00 90 | plug | 1.00 | 2 |
| | 10 09 14 10 098 90 | seal | 2.00 | 2 |
| | 7 09 21 02 102 90 | cap | 1.00 | 2 |
| | 9 04 21 34 077 00 90 | nipple | 2.00 | 2 |
| | 5 04 31 20 062 10 90 | plug | 1.00 | 2 |
| | 21 90 15 02 065 00 90 | cartridge | 1.00 | 2 |
| | 15 90 12 12 218 00 90 | base | 1.00 | 2 |
| | 1 09 31 20 003 90 | plug | 1.00 | 2 |
| | 13 09 14 05 002 90 | seal | 2.00 | 2 |
| | 11 90 23 01 045 00 90 | back-flow preventer | 2.00 | 2 |
| | 18 90 30 30 027 00 90 | screw | 2.00 | 2 |
| | 20 04 14 03 073 05 90 | gasket kit | 1.00 | 2 |