





- red brass, lead-free
- 2x back flow preventer
- 3/4" (cold/hot) connection
- female thread 1/2" connection
- thermostat cartridge
- 2x head part with cut-to-length spindle and sleeve
- 3x anti-water packing
- 3x dust cover
- soundproofing
- gauge 120 mm


Recommended miscellaneous

Extension 28 mm -	12 177 970 90
	

Recommended miscellaneous

Extension 46 mm -	12 178 970 90
	

35 527 970 Product version up to 5/12/2021

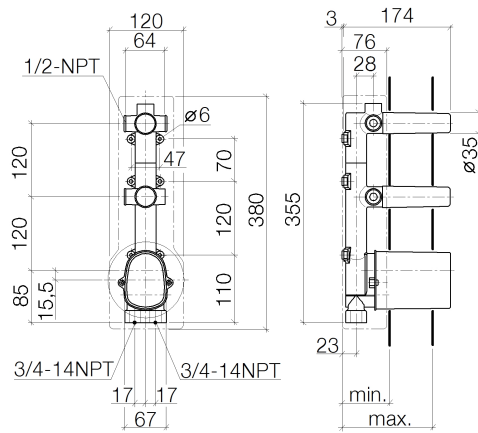


Source	min 78	max 114
Circle	80	110
Lulu	80	110
Madison	80	110
Madison Flair	80	110
TARA_LOGIC	80	110
Meta_02	80	110
Soul	80	110
Square	80	110
Cult	80	110
L'Aura	80	110
Domicil	85	110
Just	80	155
LaFleur	95	160
SUPERNOVA	95	160
Symetrics	95	160
DEQUE	95	160
Tara...	95	160
MEM	115	155
CL.1	115	156

Codes & Standards

ASME A112.18.1 cUPC

Certificates and sustainability

IAPMO_4976 (

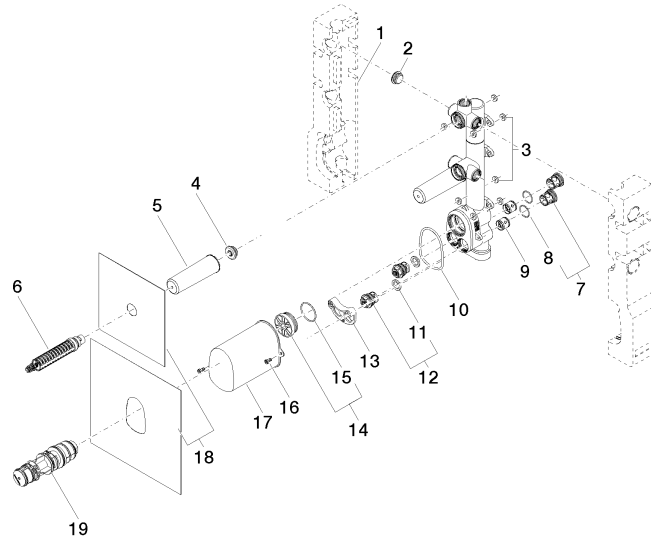

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	11 09 14 05 002 90	seal	2.00	2
	9 90 23 01 045 00 90	back-flow preventer	2.00	2
	2 04 31 20 062 10 90	plug	3.00	2
	5 09 21 02 102 90	cap	2.00	2
	1 09 11 11 014 90	accessories	1.00	2
	12 90 29 05 031 00 90	insert	2.00	2
	15 09 14 10 111 90	seal	1.00	2
	8 09 14 10 098 90	seal	2.00	2
	3 04 14 05 045 00 90	set	1.00	2
	7 04 21 34 077 00 90	nipple	2.00	2
	10 09 14 10 189 90	seal	1.00	2
	6 90 90 03 143 00 90	top	2.00	2
	4 04 31 20 006 00 90	plug	2.00	2
	13 90 12 12 218 00 90	base	1.00	2
	14 04 31 20 100 00 90	plug	1.00	2
	17 09 21 02 103 90	cap	1.00	2
	18 04 14 03 073 06 90	gasket kit	1.00	2
	16 90 30 30 027 00 90	screw	1.00	2
	19 90 15 02 065 00 90	cartridge	1.00	2