

## RAINMOON Concealed ceiling installation box -

---


35 610 970



- concealed rough parts
- Rain panel with 2 different spray modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 5 l/min (at 3 bar)
- Ceiling installation enclosure 1356 x 1356 x 290 mm
- Opening diameter 1252 mm
- Ceiling construction with adequate structural strength for the permanent attachment of the device (weight: 57.5 kg / 127 lbs. (US)). M8 threaded bolts (minimum strength: 2000 N) are required to secure the ceiling module

RAINMOON Concealed ceiling installation box -

35 610 970

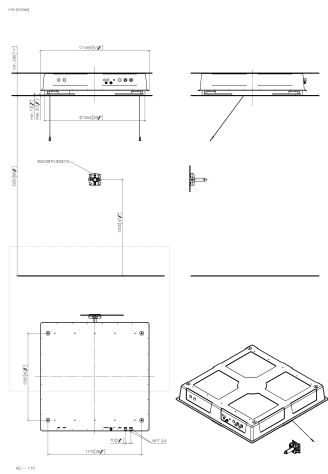


Codes & Standards

UL 1310

RAINMOON Concealed ceiling installation box -

35 610 970

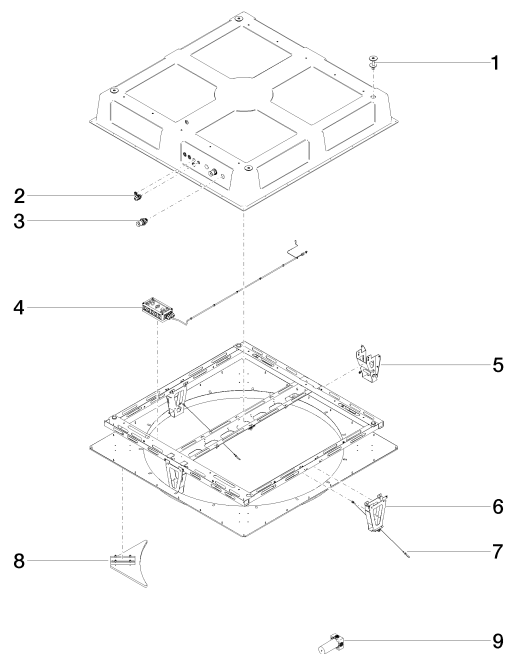

Spare parts list

| No. | Item Number        | Name                           | Quantity used | Delivery time |
|-----|--------------------|--------------------------------|---------------|---------------|
| 1   | 04 24 03 287 02 90 | fixing set                     | 4             | 60            |
| 2   | 90 10 01 089 00 90 | accessories                    | 1             | 2             |
| 3   | 90 24 03 286 00 90 | connection                     | 2             | 2             |
| 4   | 90 10 01 192 01 90 | electronic accessories         | 1             | 2             |
| 5   | 90 17 20 205 00 90 | holder                         | 1             | 2             |
| 6   | 90 17 20 209 00 90 | holder                         | 1             | 2             |
| 7   | 90 21 50 007 00 90 | accessories                    | 2             | 2             |
| 8   | 90 17 20 215 00 90 | end stop                       | 4             | 2             |
| 9   | 35 203 970-90 0010 | Concealed three-way diverter - | 1             | 2             |