

Concealed wall-mounted single-lever mixer -

SERIES-VARIOUS

35 860 970

Product version up to 11/11/2021



- red brass, lead-free
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 1x female thread 1/2" outlet for wall spout
- 1x female thread 1/2" outlet
- 2x dust cover
- anti-water packing
- soundproofing
- gauge 100 mm

Rough can be rotated to position the lever on top or to the left of the spout.

Recommended miscellaneous

	Extension 20 mm -	12 869 970 90
	<ul style="list-style-type: none"> •Not suitable for combining with META PURE (36 86X 664-FF). •Not for combination with exposed trim parts 36 86X 664-FF0010 	

Recommended miscellaneous

	Adapter for reversed water connections -	12 880 970 90
	<ul style="list-style-type: none"> •Not suitable for combining with META PURE (36 86X 664-FF). 	

Recommended miscellaneous


	Extension 20 mm -	12 870 970 90
	<ul style="list-style-type: none"> •Can only be combined with exposed trim parts 36 86X 664-FF. 	

Concealed wall-mounted single-lever mixer -

SERIES-VARIOUS

35 860 970 Product version up to 11/11/2021

mm [inches]

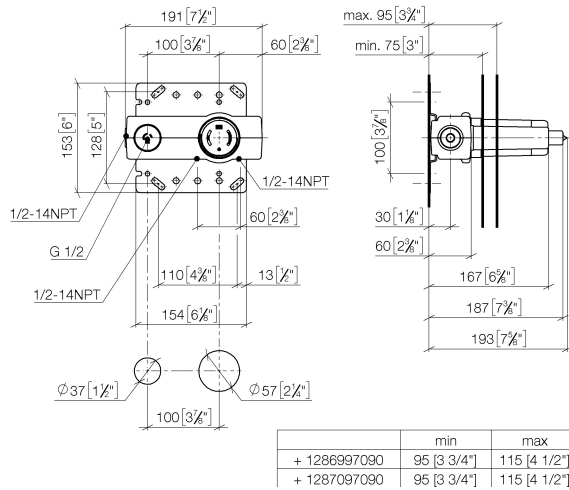

Codes & Standards

ASME A112.18.1

cUPC

NSF372


NSF61

Certificates and sustainability

IAPMO_N-4976

IAPMO_6397

IAPMO_4976 (

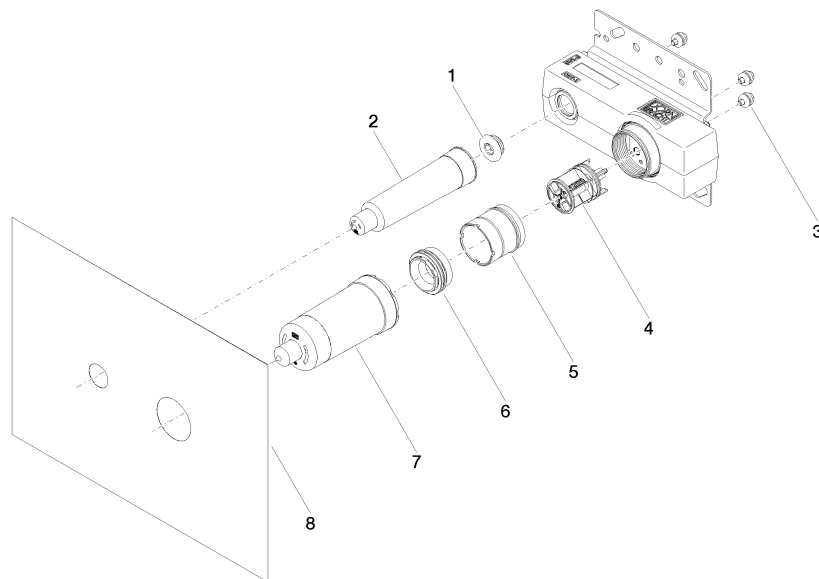

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 31 20 107 00 90	plug	1.00	2
3	90 23 01 091 00 90	set	3.00	2
6	90 24 04 349 00 90	threaded connector	1.00	2
7	09 21 02 176 90	cap	1.00	60
1	04 31 20 006 00 90	plug	1.00	2
5	90 17 01 238 00 90	sleeve	1.00	2
8	04 14 03 074 01 90	gasket kit	1.00	2
2	09 21 02 173 90	cap	1.00	2