






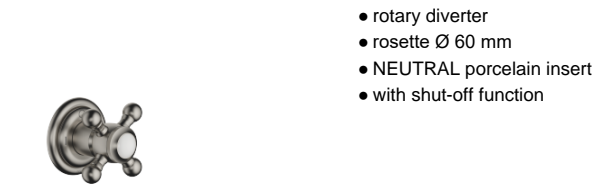

MADISON Concealed two-way diverter - Brushed Dark Platinum

MADISON


36 200 361



- rotary diverter
- rosette Ø 60 mm
- NEUTRAL porcelain insert
- with shut-off function


	Brushed Dark Platinum	36 200 361-99 0010
	Chrome	36 200 361-00 0010
	Brushed Platinum	36 200 361-06 0010
	Platinum	36 200 361-08 0010
	Durabrand (23kt Gold)	36 200 361-09 0010
	Brushed Durabrand (23kt Gold)	36 200 361-28 0010

Required miscellaneous


	Concealed two-way diverter -	35 202 970-90
	•max. recess depth 155 mm	0010
	•min. recess depth 85 mm	

36 200 361

mm [inches]



Flow rate chart

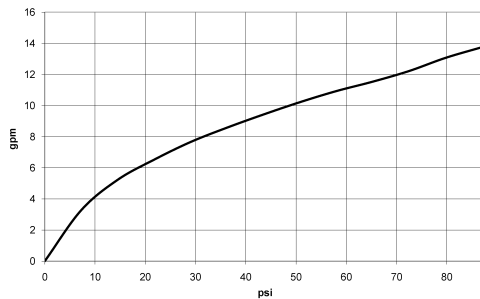

Codes & Standards

ASME A112.18.1

California Energy
Commission
(CEC)

cUPC



MADISON Concealed two-way diverter - Brushed Dark Platinum


MADISON

36 200 361

Certificates

IAPMO_4976

Product version from 4/1/2022

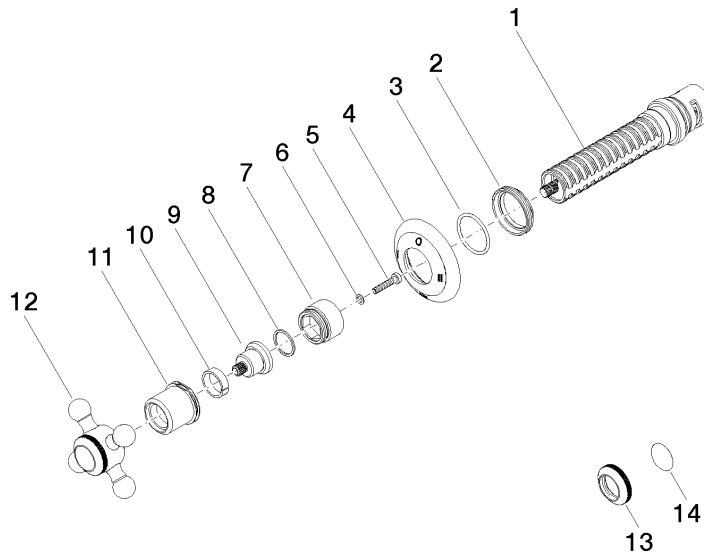



MADISON Concealed two-way diverter - Brushed Dark Platinum

MADISON

36 200 361

Spare parts list

Product version from 4/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 90 03 306 10 90	diverter	14	2