

Concealed thermostat with one function volume control - Brushed Light Gold

IMO

36 425 670



Fits: IMO, MEM, CL.1, CYO

- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset

| | | |
|--|--------------------------------|--------------------|
|  | Brushed Light Gold | 36 425 670-27 0010 |
|  | Chrome | 36 425 670-00 0010 |
|  | Brushed Platinum | 36 425 670-06 0010 |
|  | Platinum | 36 425 670-08 0010 |
|  | Dark Chrome | 36 425 670-19 0010 |
|  | Brushed Durabronze (23kt Gold) | 36 425 670-28 0010 |
|  | Matte Black | 36 425 670-33 0010 |
|  | Brushed Champagne (22kt Gold) | 36 425 670-46 0010 |
|  | Champagne (22kt Gold) | 36 425 670-47 0010 |
|  | Brushed Chrome | 36 425 670-93 0010 |
|  | Brushed Dark Platinum | 36 425 670-99 0010 |

Required miscellaneous



Concealed thermostat for one- and two-way outlets -
 •min. recess depth 80 mm
 •max. recess depth 136 mm

35 426 970-90 0010

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90


Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

36 425 670

mm [inches]

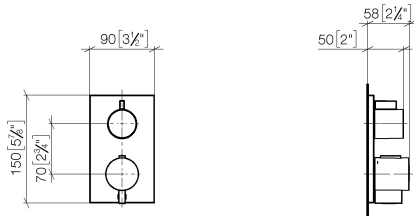

Flow rate chart

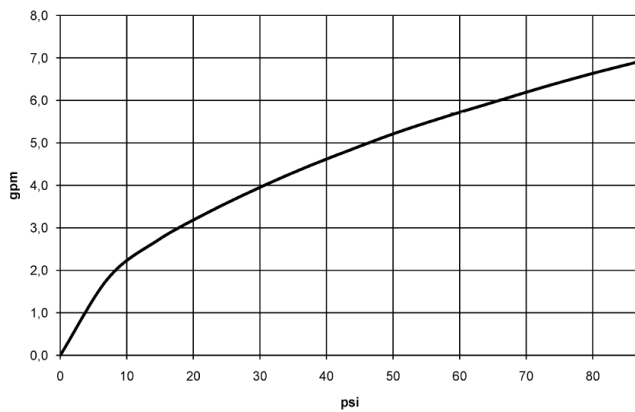

Codes & Standards

ADA


ASME

A112.18.1/CSA

B125.1

36 425 670

Product version from 6/30/2022

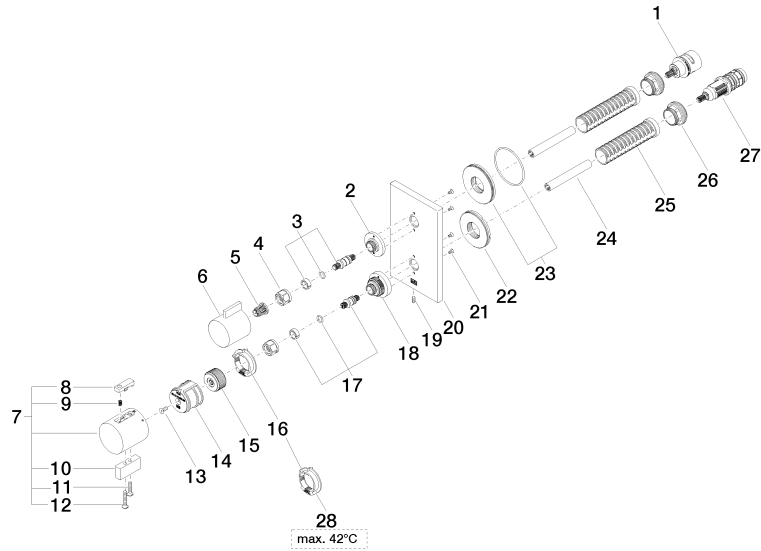



Concealed thermostat with one function volume control - Brushed Light Gold

IMO

36 425 670

Spare parts list

Product version from 6/30/2022