



MADISON Concealed thermostat with one function volume control - Brushed Durabrace (23kt Gold)

MADISON

36 425 977



- cover plate Ø 175 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset

	Brushed Durabrace (23kt Gold)	36 425 977-28 0010
	Chrome	36 425 977-00 0010
	Brushed Platinum	36 425 977-06 0010
	Platinum	36 425 977-08 0010
	Durabrace (23kt Gold)	36 425 977-09 0010
	Brushed Dark Platinum	36 425 977-99 0010

Required miscellaneous



Concealed thermostat for one- and two-way outlets - 35 426 970-90 0010
 • max. recess depth 136 mm
 • min. recess depth 80 mm

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90




MADISON Concealed thermostat with one function volume control - Brushed
Durabronz (23kt Gold)

MADISON

36 425 977
mm [inches]

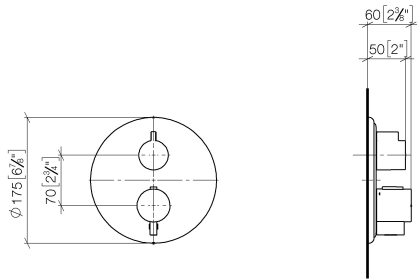

Flow rate chart

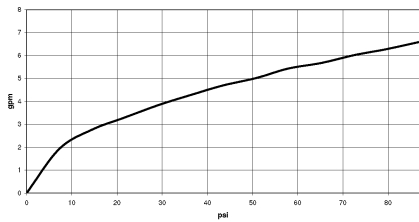

Codes & Standards

ADA
ASME
A112.18.1/CSA
B125.1

MADISON Concealed thermostat with one function volume control - Brushed Durabrand (23kt Gold)

MADISON


36 425 977

Product version up to 8/24/2020

Product version from 8/24/2020 to 2/1/2021

Product version from 2/1/2021 to 6/30/2022

Product version from 6/30/2022

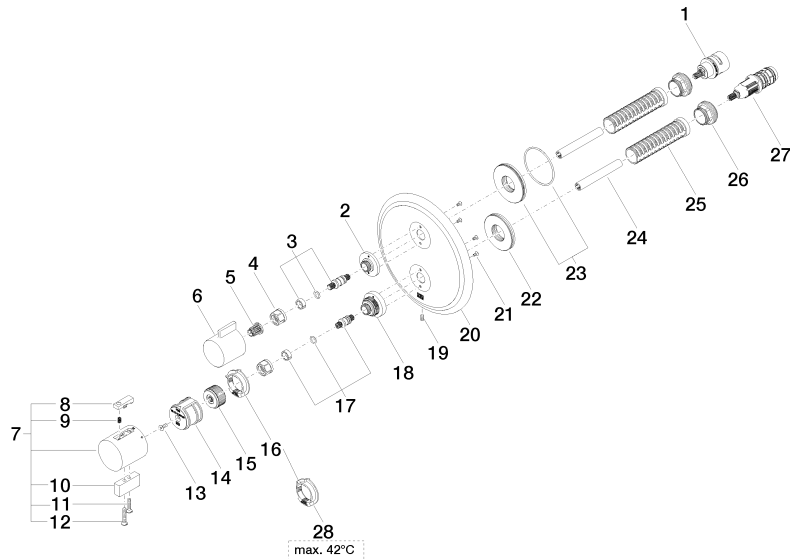



MADISON Concealed thermostat with one function volume control - Brushed Durabross (23kt Gold)

MADISON

36 425 977

Spare parts list

Product version up to 8/24/2020
Product version from 8/24/2020 to 2/1/2021
Product version from 2/1/2021 to 6/30/2022

Product version from 6/30/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 90 03 166 00 90	top	35	2