

Concealed thermostat with two function volume control - Brushed Light Gold

SERIES SPECIFIC

36 426 670 Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- single flow function only

	Brushed Light Gold	36 426 670-27 0010
	Chrome	36 426 670-00 0010
	Brushed Platinum	36 426 670-06 0010
	Platinum	36 426 670-08 0010
	Dark Chrome	36 426 670-19 0010
	Brushed Durabronze (23kt Gold)	36 426 670-28 0010
	Matte Black	36 426 670-33 0010
	Brushed Champagne (22kt Gold)	36 426 670-46 0010
	Champagne (22kt Gold)	36 426 670-47 0010
	Brushed Chrome	36 426 670-93 0010
	Brushed Dark Platinum	36 426 670-99 0010

Required miscellaneous



Concealed thermostat for one- and two-way outlets -

35 426 970-90 0010

- min. recess depth 80 mm
- max. recess depth 136 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90




Concealed thermostat with two function volume control - Brushed Light Gold

SERIES SPECIFIC

36 426 670 Product version from 6/30/2022

mm [inches]

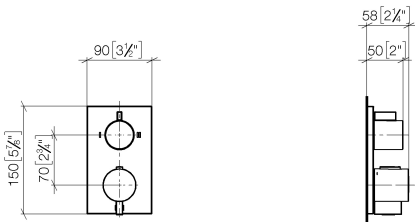

Codes & Standards

ADA	California Energy Commission (CEC)
-----	------------------------------------

