

## LULU Concealed thermostat with two function volume control - Brushed Platinum

LULU

36 426 710



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- single flow function only



Brushed Platinum

36 426 710-06 0010



Chrome

36 426 710-00 0010

### Required miscellaneous



#### **Concealed thermostat for one- and two-way outlets -**

- max. recess depth 136 mm
- min. recess depth 80 mm

35 426 970-90 0010

### Recommended miscellaneous



#### **xGRID Attachment set for integrating in the dry wall construction -**

12 340 970 90

### Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90




LULU Concealed thermostat with two function volume control - Brushed Platinum

LULU

36 426 710  
mm [inches]

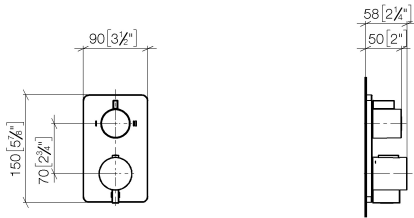

Flow rate chart

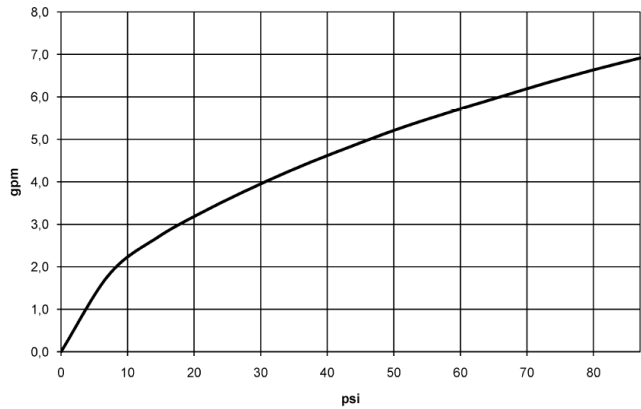

Codes & Standards

ADA	ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)
cUPC			



## LULU Concealed thermostat with two function volume control - Brushed Platinum

---

LULU

36 426 710

Certificates

---

IAPMO\_4976

## LULU Concealed thermostat with two function volume control - Brushed Platinum

LULU


36 426 710

Product version up to 8/24/2020

Product version from 8/24/2020 to 2/1/2021

Product version from 2/1/2021 to 6/30/2022

**Product version from 6/30/2022**

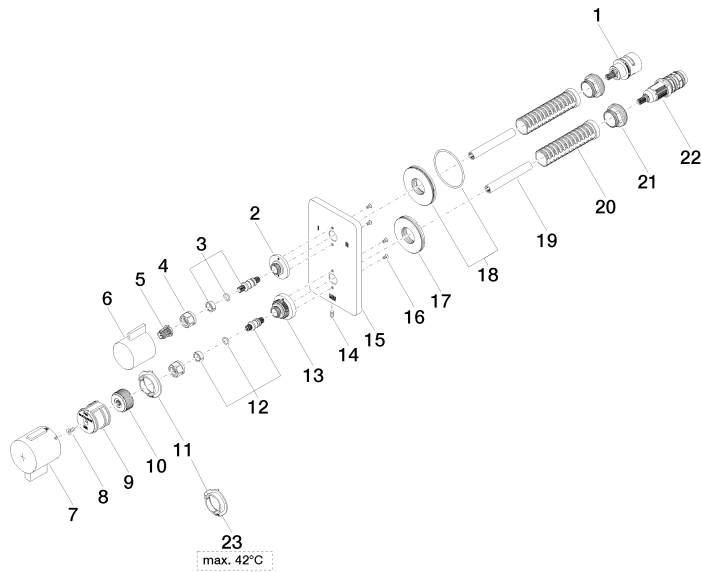



## LULU Concealed thermostat with two function volume control - Brushed Platinum

LULU

36 426 710

### Spare parts list

Product version up to 8/24/2020

Product version from 8/24/2020 to 2/1/2021

Product version from 2/1/2021 to 6/30/2022

### Product version from 6/30/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 90 03 163 00 90	diverter	30	2