

Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold) SERIES SPECIFIC

36 426 970 Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- single flow function only

	Brushed Champagne (22kt Gold)	36 426 970-46 0010
	Chrome	36 426 970-00 0010
	Brushed Platinum	36 426 970-06 0010
	Platinum	36 426 970-08 0010
	Dark Chrome	36 426 970-19 0010
	Light Gold	36 426 970-26 0010
	Brushed Light Gold	36 426 970-27 0010
	Brushed Durabronze (23kt Gold)	36 426 970-28 0010
	Matte Black	36 426 970-33 0010
	Brushed Dark Brass	36 426 970-39 0010
	Brushed Bronze	36 426 970-42 0010
	Champagne (22kt Gold)	36 426 970-47 0010
	Brushed Chrome	36 426 970-93 0010
	Brushed Dark Platinum	36 426 970-99 0010

Required miscellaneous



Concealed thermostat for one- and two-way outlets - 35 426 970-90 0010
 • max. recess depth 136 mm
 • min. recess depth 80 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90




Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 426 970 Product version from 6/30/2022

mm [inches]

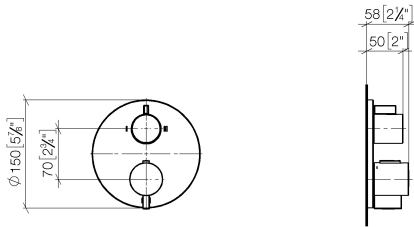

Codes & Standards			
ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC

Certificates and sustainability
IAPMO_4976 (

Concealed thermostat with two function volume control - Brushed Champagne (22kt Gold) SERIES SPECIFIC

36 426 970 Product version from 6/30/2022

