














WATER FAN vertical Concealed body spray - Dark Chrome

36 513 979



- AQUAPRESSURE FLOW, max. flow rate 6.8 l/min (at 3 bar)
- water jet adjustable
- cover plate 240 x 60 mm
- 1/2" connection
- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Dark Chrome	36 513 979-19 0010
	Chrome	36 513 979-00 0010
	Brushed Platinum	36 513 979-06 0010
	Platinum	36 513 979-08 0010
	Light Gold	36 513 979-26 0010
	Brushed Light Gold	36 513 979-27 0010
	Brushed Durabronze (23kt Gold)	36 513 979-28 0010
	Matte Black	36 513 979-33 0010
	Brushed Bronze	36 513 979-42 0010
	Brushed Champagne (22kt Gold)	36 513 979-46 0010
	Champagne (22kt Gold)	36 513 979-47 0010
	Brushed Chrome	36 513 979-93 0010
	Brushed Dark Platinum	36 513 979-99 0010

Required miscellaneous



Concealed wall installation box -	35 206 970-90
• max. recess depth mm	0010
• min. recess depth mm	

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
--	---------------

Required miscellaneous




xGRID Installation track 555 mm -	12 360 970 90
--	---------------



WATER FAN vertical Concealed body spray - Dark Chrome

36 513 979

mm [inches]

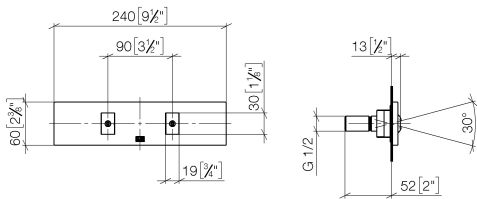

Flow rate chart



Codes & Standards

ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	cUPC
----------------	---------------------------------	--	------



WATER FAN vertical Concealed body spray - Dark Chrome

36 513 979

Certificates

IAPMO_4976 (

WATER FAN vertical Concealed body spray - Dark Chrome

36 513 979

