

WATER CURVE Concealed body spray - Brushed Platinum

SERIES-VARIOUS

36 514 979 Product version from 10/1/2023

















- AQUAPRESSURE FLOW, max. flow rate 6.8 l/min (at 3 bar)
- water jet adjustable
- Function from: l/min

Technical data:

- cover plate 120 x 60 mm
- 1/2" connection

Notes:

- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- This product can contribute to Water Use Reduction in LEED® Green Building Rating

	Brushed Platinum	36 514 979-06 0010
	Chrome	36 514 979-00 0010
	Platinum	36 514 979-08 0010
	Dark Chrome	36 514 979-19 0010
	Light Gold	36 514 979-26 0010
	Brushed Light Gold	36 514 979-27 0010
	Brushed Durabronze (23kt Gold)	36 514 979-28 0010
	Matte Black	36 514 979-33 0010
	Brushed Dark Brass	36 514 979-39 0010
	Brushed Bronze	36 514 979-42 0010
	Brushed Champagne (22kt Gold)	36 514 979-46 0010
	Champagne (22kt Gold)	36 514 979-47 0010
	Brushed Chrome	36 514 979-93 0010
	Brushed Dark Platinum	36 514 979-99 0010


Required miscellaneous

Concealed adapter -

35 080 970-90
0010



mm [inches]

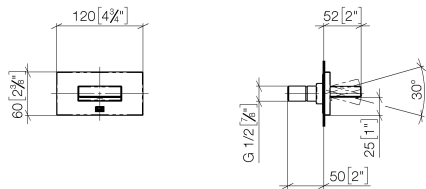


Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC
----------------	------------------------------------------	------

Certificates and sustainability

IAPMO_4976 (

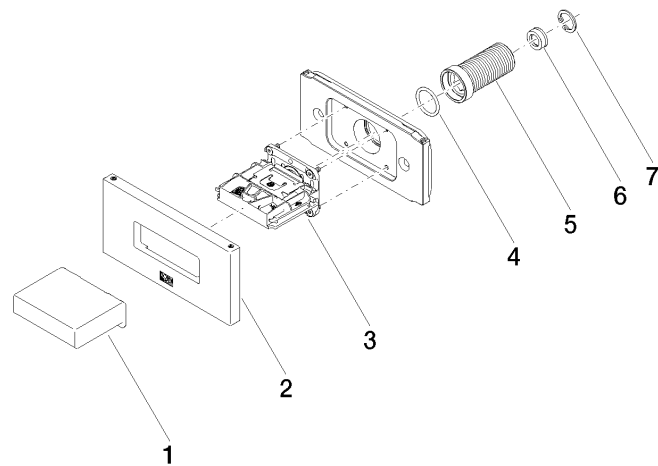

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	3 90 29 03 088 00 90	insert	1.00	2
	7 09 16 01 014 90	ring	1.00	2
	6 09 23 01 165 90	flow reducer	1.00	2
	2 90 27 97 041 00-06	rosette	1.00	10
	5 09 24 04 336 90	nipple	1.00	2
	1 09 17 01 230-06	casing	1.00	10
	4 90 14 10 010 00 90	seal	1.00	2