

WATER POINTS Concealed body spray FlowReduce - Platinum

SERIES-VARIOUS

36 515 979 Product version from 4/1/2024



- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- Function from: l/min
- with anti-scale system















Technical data:

- cover plate 120 x 120 mm
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- **Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm**

Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm

| | | |
|---|--------------------------------|---------------|
|  | Platinum | 36 515 979-08 |
|  | Chrome | 36 515 979-00 |
|  | Brushed Platinum | 36 515 979-06 |
|  | Dark Chrome | 36 515 979-19 |
|  | Light Gold | 36 515 979-26 |
|  | Brushed Light Gold | 36 515 979-27 |
|  | Brushed Durabronze (23kt Gold) | 36 515 979-28 |
|  | Matte Black | 36 515 979-33 |
|  | Brushed Dark Brass | 36 515 979-39 |
|  | Brushed Bronze | 36 515 979-42 |
|  | Brushed Champagne (22kt Gold) | 36 515 979-46 |
|  | Champagne (22kt Gold) | 36 515 979-47 |
|  | Brushed Chrome | 36 515 979-93 |
|  | Brushed Dark Platinum | 36 515 979-99 |

Required miscellaneous



- Concealed wall installation box -** 35 205 970-90 0010
- max. recess depth 110 mm
 - min. recess depth 85 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous




- WATER POINTS Adapter plate -** 12 305 970 90
- adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.

Required miscellaneous




- xGRID Installation track 555 mm -** 12 360 970 90


mm [inches]

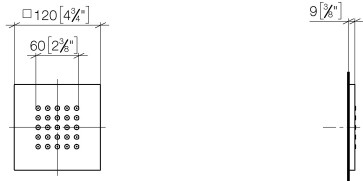

Flow rate chart

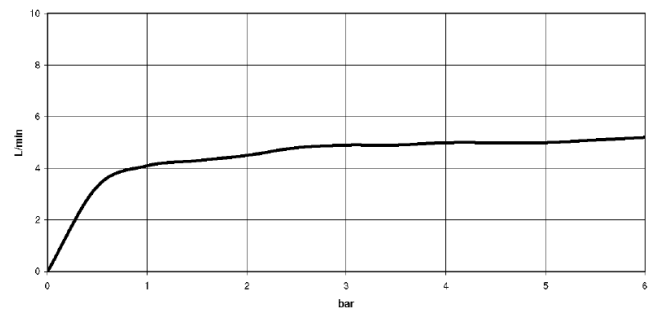

Trajectory diagram

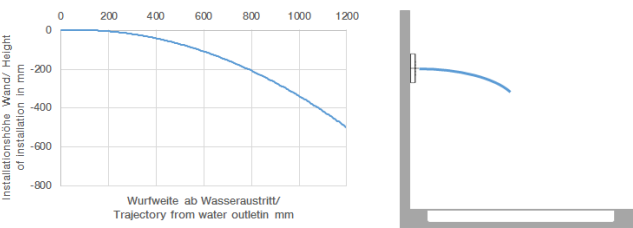

Codes & Standards

| | | | |
|----------------|------------------------------------|-----------------------------|-----------|
| ASME A112.18.1 | California Energy Commission (CEC) | cUPC | DIN 4109 |
| ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations | Ü-Zeichen |



WATER POINTS Concealed body spray FlowReduce - Platinum

SERIES-VARIOUS

36 515 979 Product version from 4/1/2024

Certificates and sustainability

LGA_18 WRAS_1304 IAPMO_4976 (



Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--------------|---------------|---------------|
| 4 | 09 30 11 024 90 | disc | 8.00 | 2 |
| 2 | 09 30 31 022 90 | screw | 4.00 | 2 |
| 16 | 09 31 11 048 90 | pin | 1.00 | 2 |
| 1 | 09 28 01 024 90 | holder | 1.00 | 2 |
| 11 | 09 17 97 057 90 | holder | 1.00 | 2 |
| 12 | 09 29 30 043 90 | insert | 1.00 | 2 |
| 5 | 09 12 12 205 90 | base | 1.00 | 2 |
| 6 | 09 16 01 016 90 | ring | 1.00 | 2 |
| 8 | 09 14 10 130 90 | seal | 1.00 | 2 |
| 13 | 09 12 01 075 90 | insert | 1.00 | 2 |
| 14 | 09 14 03 117 90 | seal | 1.00 | 2 |
| 10 | 09 17 11 146 90 | distributor | 1.00 | 60 |
| 17 | 09 23 01 052 90 | flow reducer | 1.00 | 2 |
| 9 | 09 16 01 017 90 | ring | 1.00 | 2 |
| 3 | 09 30 30 031 90 | screw | 8.00 | 2 |
| 15 | 09 27 98 004-08 | rosette | 1.00 | 40 |
| 7 | 90 23 01 032 00 90 | flow reducer | 1.00 | 2 |