















## WATER BAR Concealed body spray FlowReduce - Brushed Dark Platinum

36 517 979 Product version from 5/16/2020



- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system
- cover plate 240 x 60 mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

	Brushed Dark Platinum	36 517 979-99
	Chrome	36 517 979-00
	Brushed Platinum	36 517 979-06
	Platinum	36 517 979-08
	Dark Chrome	36 517 979-19
	Light Gold	36 517 979-26
	Brushed Light Gold	36 517 979-27
	Brushed Durabronze (23kt Gold)	36 517 979-28
	Matte Black	36 517 979-33
	Brushed Bronze	36 517 979-42
	Brushed Champagne (22kt Gold)	36 517 979-46
	Champagne (22kt Gold)	36 517 979-47
	Brushed Chrome	36 517 979-93

### Required miscellaneous



**Concealed wall installation box -** 35 206 970-90  
 • max. recess depth mm 0010  
 • min. recess depth mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90

## WATER BAR Concealed body spray FlowReduce - Brushed Dark Platinum

36 517 979 Product version from 5/16/2020


mm [inches]



Flow rate chart



Trajectory diagram

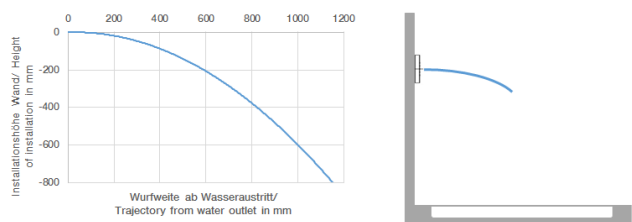

### Codes & Standards

ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	DIN 4109	ISO 3822
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	



## WATER BAR Concealed body spray FlowReduce - Brushed Dark Platinum

---

36 517 979 Product version from 5/16/2020

### Certificates


---

WRAS\_1304

LGA\_19

## WATER BAR Concealed body spray FlowReduce - Brushed Dark Platinum

36 517 979 Product version from 5/16/2020

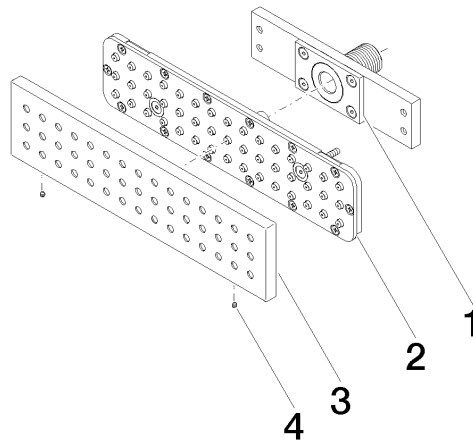

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 11 02 137 00 90	connection	1	2
2	90 11 02 332 00-00	insert	1	10
3	09 27 99 001-99	rosette	1	20
4	09 31 11 081 90	pin	1	2