

## RAINMOON Rain panel - Matte White

41 610 979



- exposed trim parts

### 1x rain panel for ceiling installation

- Rain panel with 2 different spray modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 6 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 5 l/min (at 3 bar)
- Indirect ambient lighting, warm white LED light strip
- Matt white cover, RAL 9003
- Outer diameter 1240 mm, opening diameter 450 mm
- with anti-scale system
- Outer diameter 1240 mm, opening diameter 450 mm
- Weight 22.5 kg
- Protection rating IP67

**Must be installed with three-way diverter 35 104 970-90 0010 (rough included)**

**Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.**

**Three-way diverter trim is sold separately**

**Please refer to Planning Guide for proper sizing and installation methods**

Must be installed with three-way diverter 35 104 970-90 0010 (rough included)

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

Please refer to Planning Guide for proper sizing and installation methods

### Required miscellaneous



#### **RAINMOON Concealed ceiling installation box -**


35 610 970-90 0010

- Ceiling installation enclosure 1356 x 1356 x 290 mm
- Opening diameter 1252 mm
- min. recess depth mm
- concealed rough parts




RAINMOON Rain panel - Matte White

41 610 979

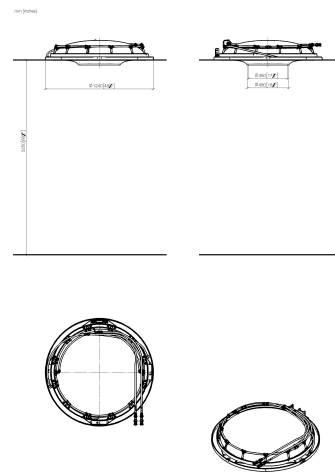

42 - 110

Flow rate chart

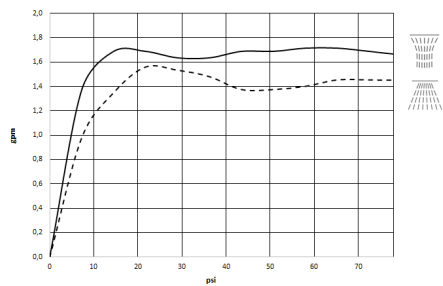


Codes & Standards

California Energy Commission (CEC)      UL 1310

## RAINMOON Rain panel - Matte White

41 610 979

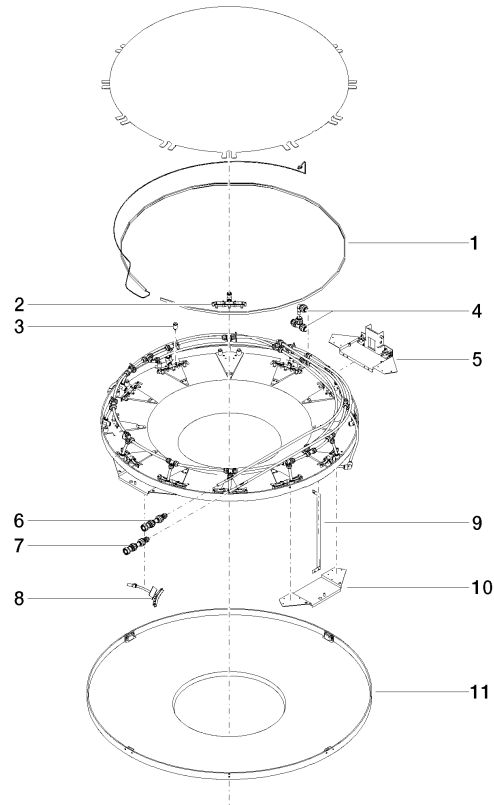



RAINMOON Rain panel - Matte White

41 610 979

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 10 01 183 00 90	lamp	61	2