







13 801 670



- 200mm projection
- rectangular normal flow
- hole diameter 37 mm
- 1/2" connection
- max. flow 25.1 l/min at 3 bar flow pressure
- WRAS 2005002

	Brushed Light Gold	13 801 670-27
	Chrome	13 801 670-00
	Brushed Platinum	13 801 670-06
	Dark Chrome	13 801 670-19
	Matte Black	13 801 670-33
	Brushed Chrome	13 801 670-93

Required miscellaneous

Concealed adapter -

35 080 970-90
0010



13 801 670

mm [inches]




Flow rate chart



Codes & Standards

ASME
A112.18.1/CSA
B125.1

13 801 670

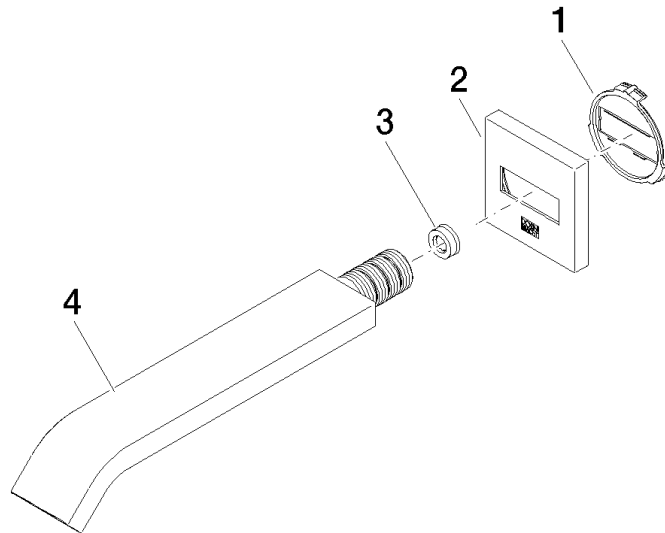

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 18 40 139 90	base	1	2
2	09 27 67 008-27	rosette	1	60
3	09 23 01 057 90	flow reducer	1	2
4	04 28 22 241 00-27	spout	1	60