

17 861 875



- 146mm projection
- rigid, thermally insulated spout
- laminar flow
- height of mixer 288 mm
- height up to laminar flow regulator 180 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free
- one lever for cold and hot water
- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

The installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.


Detailed planning information and technical data can be found at www.dornbracht.com/professional

NOTE: Not compatible with Reverse Osmosis

Not compatible with reverse osmosis filtration

	Dark Chrome	17 861 875-19
	Chrome	17 861 875-00
	Brushed Platinum	17 861 875-06
	Platinum	17 861 875-08
	Durabrand (23kt Gold)	17 861 875-09
	Brushed Durabrand (23kt Gold)	17 861 875-28
	Matte Black	17 861 875-33
	Brushed Champagne (22kt Gold)	17 861 875-46
	Champagne (22kt Gold)	17 861 875-47
	Brushed Chrome	17 861 875-93
	Brushed Dark Platinum	17 861 875-99

Technical drawing of the M34x1 handle, showing two views: a side view and a top view. The side view shows a handle with a curved top and a base. Dimensions include a total height of 288 mm [11 1/8"], a base height of 180 mm [7 1/8"], a top width of 154 mm [6"], a base width of 146 mm [5 3/4"], and a base diameter of 60 mm [2 3/8"]. The top view shows a circular base with a diameter of 35 mm [1 3/8"] and a central hole with a diameter of 11 mm [7/8"]. The base is mounted on a wall with a hole of diameter 11 mm [7/8"] and a distance of 534 mm [21"] from the wall to the base. The base is secured with an M34x1 screw and a G 3/8 nut. The distance from the wall to the center of the base is 481 mm [18 5/8"]. The distance from the wall to the center of the base is 551 mm [21 7/8"]. The distance from the wall to the center of the base is 551 mm [21 7/8"].

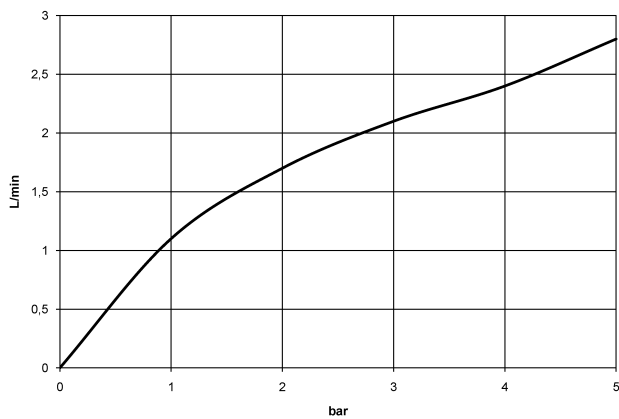

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
Executive Order no. 1007	NSF372	NSF61	



TARA ULTRA HOT & COLD WATER DISPENSER - Dark Chrome

TARA ULTRA

17 861 875

Certificates and sustainability

IAPMO_N-4	IAPMO_4976	GDV_0400	IAPMO_6
-----------	------------	----------	---------

17 861 875

Parts for other
finishes can be found
here: [Chrome](#)

