

## Rain shower for surface-mounted ceiling installation 300 mm - Brushed Champagne (22kt Gold)

28 031 970			
	<ul> <li>rain shower Ø 300 mm</li> <li>PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)</li> <li>PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)</li> </ul>	Brushed Champagne (22kt Gold)	28 031 970-46 0010
	<ul> <li>Distance to ceiling from bottom edge of shower 40 mm</li> <li>with anti-scale system</li> </ul>	Chrome	28 031 970-00 0010
	Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two	Brushed Platinum	28 031 970-06 0010
	functions simultaneously. Three-way diverter trim is sold separately	Platinum	28 031 970-08 0010
Fits: TARA, LISSÉ, VAIA, META	<b>Pre-assembly kit for three-way diverter included</b> Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.	Dark Chrome	28 031 970-19 0010
		Light Gold	28 031 970-26 0010
	Three-way diverter trim is sold separately	Brushed Light Gold	28 031 970-27 0010
	Pre-assembly kit for three-way diverter included	Brushed Durabrass (23kt Gold)	28 031 970-28 0010
		Matte Black	28 031 970-33 0010
		Brushed Bronze	28 031 970-42 0010

Champagne (22kt


Brushed Chrome

Brushed Dark

Platinum

Gold)

### Required miscellaneous



28 031 970-47 0010


28 031 970-93 0010


28 031 970-99 0010




# Rain shower for surface-mounted ceiling installation 300 mm - Brushed Champagne (22kt Gold)

28 031 970 mm [inches]





### Flow rate chart




### Codes & Standards

California Energy Commission (CEC)



28 031 970

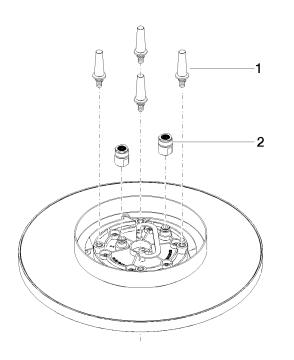

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2