

### Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Light Gold

#### 28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40
- mm with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
  Not suitable for use in a steam room.
- Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency


Three-way diverter trim is sold separately

Pre-assembly kit for three-way diverter included

includes light bulbs with a Class F energy efficiency

Brushed Light Gold	28 032 970-27 0010
Chrome	28 032 970-00 0010
Brushed Platinum	28 032 970-06 0010
Platinum	28 032 970-08 0010
Dark Chrome	28 032 970-19 0010
Light Gold	28 032 970-26 0010
Brushed Durabrass (23kt Gold)	28 032 970-28 0010
Matte Black	28 032 970-33 0010
Brushed Bronze	28 032 970-42 0010
Brushed Champagne (22kt Gold)	28 032 970-46 0010
Champagne (22kt Gold)	28 032 970-47 0010
Brushed Chrome	28 032 970-93 0010
Brushed Dark Platinum	28 032 970-99 0010


#### Required miscellaneous




TARA



Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Light Gold



### Flow rate chart




#### Codes & Standards

California Energy Commission (CEC)



# Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Light Gold

28 032 970

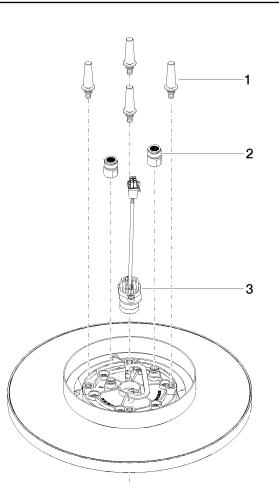

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2