

#### Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -Chrome

IMO



Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- Not suitable for use in a steam room. Three-way diverter trim is sold separately. Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency

Three-way diverter trim is sold separately. Pre-assembly kit for three-way diverter included includes light bulbs with a Class F energy efficiency

	Chrome	28 042 980-00 0010
)	Brushed Platinum	28 042 980-06 0010
	Platinum	28 042 980-08 0010
	Dark Chrome	28 042 980-19 0010
t	Brushed Light Gold	28 042 980-27 0010
	Brushed Durabrass (23kt Gold)	28 042 980-28 0010
	Matte Black	28 042 980-33 0010
	Brushed Champagne (22kt Gold)	28 042 980-46 0010
	Champagne (22kt Gold)	28 042 980-47 0010
	Brushed Chrome	28 042 980-93 0010
	Brushed Dark Platinum	28 042 980-99 0010

#### Required miscellaneous



Concealed ceiling installation box 35 042 970-90 for surface-mounted ceiling installation with light -


- •max. recess depth 115 mm
- •Provided by customer: Light switch
- •min. recess depth 90 mm
- •Pre-assembly kit for three-way

diverter included






## Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - Chrome



#### Flow rate chart



#### Codes & Standards

California Energy Commission (CEC) Water Sense





### Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -Chrome

IMO

28 042 980

Certificates


IAPMO\_11777. IAPMO\_4976 (7).





# Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - Chrome

28 042 980

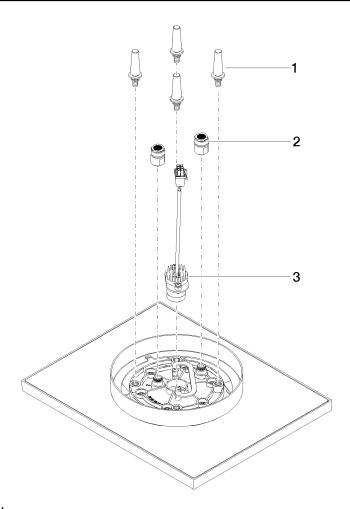

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2