

# TARA ULTRA Single-lever mixer Pull-down with spray function - Dark Chrome

TARA ULTRA

33 870 875



- 240mm projection
- pivotable spout 360°
- Optional swivel limiter available with swivel limiter set 12 823 970 90
- laminar and spray flow
- height of mixer 500 mm
- height up to laminar flow regulator 240 mm
- hole diameter 35 mm
- 2 x pressure hose with 3/8" cap nut
- 1800 mm metal shower hose
- sprayface with anti-scaling system
- max. flow 5.7 l/min at 3 bar flow pressure
- lead-free
- Flow modes can be changed while the water is running
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

Push button locks into spray mode when pressed. To switch back to laminar flow the water must be turned off.

	Dark Chrome	33 870 875-19 0010
	Chrome	33 870 875-00 0010
	Brushed Platinum	33 870 875-06 0010
	Platinum	33 870 875-08 0010
	Durabrass (23kt Gold)	33 870 875-09 0010
	Brushed Durabrass (23kt Gold)	33 870 875-28 0010
	Matte Black	33 870 875-33 0010
	Brushed Bronze	33 870 875-42 0010
	Brushed Champagne (22kt Gold)	33 870 875-46 0010
	Champagne (22kt Gold)	33 870 875-47 0010
	Brushed Chrome	33 870 875-93 0010
	Brushed Dark Platinum	33 870 875-99 0010

## Recommended miscellaneous

	<b>Swivel limitation set -</b>	12 823 970 90
--	--------------------------------	---------------

## Recommended miscellaneous

	<b>Dispenser without rosette - Chrome</b>	82 424 970-00
--	---	---------------

## Recommended miscellaneous

	<b>Dispenser without rosette - Dark Chrome</b>	82 424 970-19
--	--	---------------

## Recommended miscellaneous


	<b>AIR SWITCH Control button - Chrome</b>	10 713 970-00
--	---	---------------

## Recommended miscellaneous

	<b>AIR SWITCH Control button - Dark Chrome</b>	10 713 970-19
--	--	---------------

33 870 875

mm [inches]

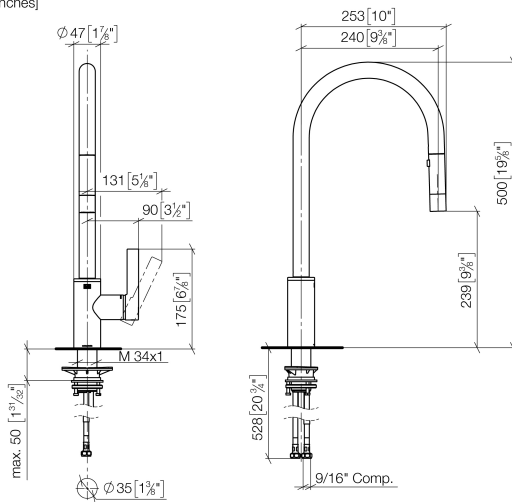

### Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
NSF372	NSF61		

### Certificates and sustainability

IAPMO\_N-4976      IAPMO\_6397      IAPMO\_4976 (

33 870 875

