




33 950 210



- 204mm projection
- pivotable spout 360°
- air-enriched flow
- max. flow 5 l/min at 3 bar flow pressure
- lead-free
- fabric braided hose 1500 mm

Intrinsic protection against back flow.


	Chrome	33 950 210-00 0010
	Soft Black	33 950 210-69 0010
	Brushed Nickel	33 950 210-70 0010



DORNBRACHT PIUR Single-lever mixer Pull-out - Chrome

DORNBRACHT
PIUR

33 950 210

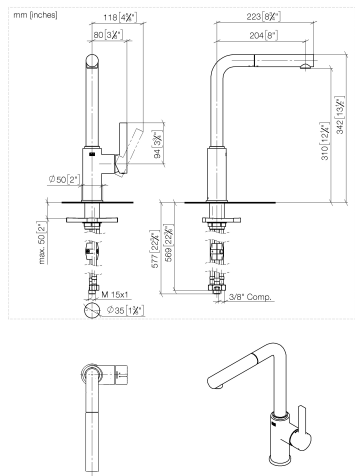

Codes & Standards


ASME A112.18.1	California Energy Commission (CEC)	cUPC	NSF372
NSF61			

Certificates and sustainability

IAPMO_N-4976	IAPMO_6397	IAPMO_4976 (
--------------	------------	--------------

33 950 210

Parts for other
finishes can be found
here: [Soft Black](#)

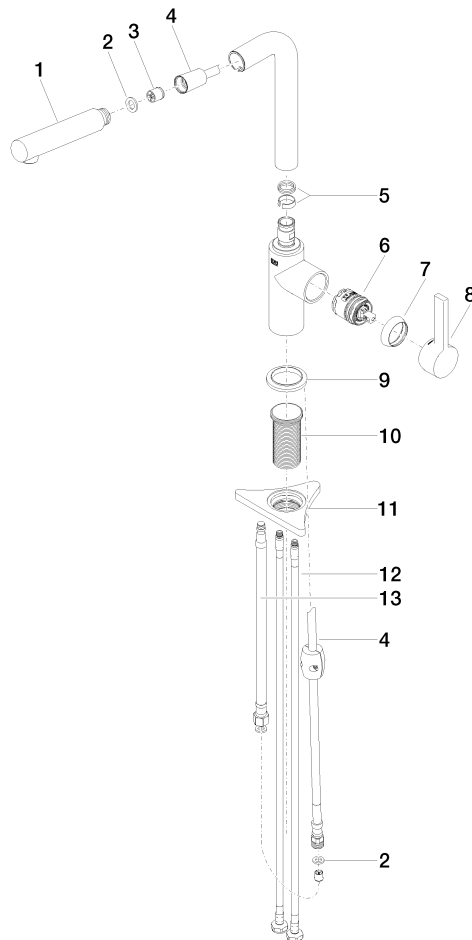

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	9 90 27 21 001 00-00	rosette	1.00	2
	8 90 20 21 001 00-00	handle	1.00	2
	3 90 23 01 051 01 90	flow reducer	1.00	2
	12 04 30 04 103 00 90	hose	2.00	2
	13 90 30 04 110 00 90	hose	1.00	2
	10 90 30 01 200 00 90	shaft	1.00	2
	4 90 30 02 101 00 90	hose	1.00	2
	1 90 12 11 180 01-00	shower	1.00	2
	2 90 14 05 081 00 90	seal	1.00	2
	6 90 15 05 060 00 90	cartridge	1.00	2
	7 90 28 30 011 00-00	cover	1.00	2
	5 90 14 15 060 00 90	gasket kit	1.00	2
	11 90 23 10 003 00 90	fixing set	1.00	2