

#### MADISON Showerpipe with shower thermostat without hand shower - Brushed Durabrass (23kt Gold)

**MADISON** 

34 459 360



- shower with fixed riser projection 420mm
- overhead shower: rain flow
- rain shower Ø 200 mm
- rain shower with anti-scale system
- max. rainshower flow 6.8 l/min
- rotary diverter for fixed-riser shower/hand shower
- height of fittings up to rain shower (bottom edge)
- height of fittings up to top edge of elbow 1160mm
- two-part push-on rosette Ø 65 mm
- rosette for shower holder Ø 65mm
- rosette for wall mounting Ø 60mm
- gauge 150 mm 13 mm
- metal shower hose 1250mm with integrated antitwist protection
- 1/2" connection
- Pipe diameter 20 mm
- This product reduces water consumption by % (compared to requirements of EPAct '92)
- This product can contribute to Water Use
  Reduction in LEED® Green Building Rating Intrinsic protection against back flow.

NOTE: Hand shower sold separately. Please see hand shower options under the miscellaneous articles section of each series.

Intrinsic protection against back flow.

NOTE: Hand shower sold separately. Please see hand shower options under the miscellaneous articles section of each series.

#### Required miscellaneous

Concealed	l adapter -
-----------	-------------

35 080 970-90



0010 •please order two adapters (USA only)









### MADISON Showerpipe with shower thermostat without hand shower - Brushed Durabrass (23kt Gold)

**34 459 360** 1:10



#### Flow rate chart



#### Codes & Standards


ASME	California Energy
A112.18.1/CSA	Commission
B125.1	(CEC)





# MADISON Showerpipe with shower thermostat without hand shower - Brushed Durabrass (23kt Gold)

34 459 360

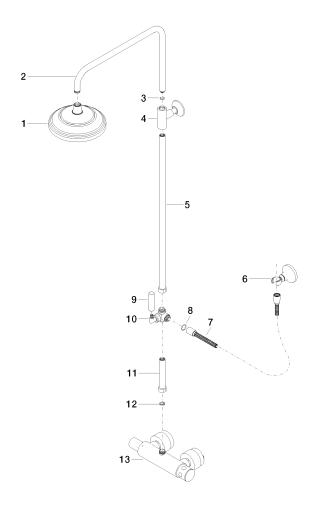



# MADISON Showerpipe with shower thermostat without hand shower - Brushed Durabrass (23kt Gold)

MADISON

34 459 360

### **Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
	04 12 05 038 30-28	shower	17	20