


## Concealed three-way diverter -

---

35 104 970




- red brass, lead-free
- 2x female thread 1/2" connections
- 3x female thread 1/2" outlet
- cut-to-length spindle and sleeve
- dust cover
- anti-water packing
- soundproofing

**Concealed three-way diverter -**


35 104 970

mm [inches]

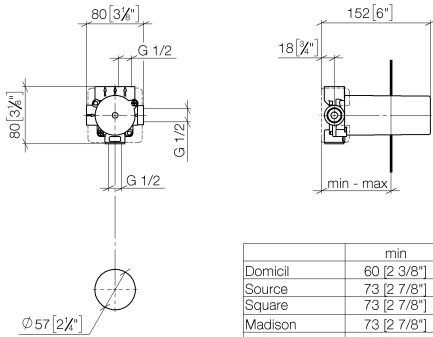

	min	max
Domicil	60 [2 3/8"]	105 [4 1/8"]
Source	73 [2 7/8"]	123 [4 7/8"]
Square	73 [2 7/8"]	123 [4 7/8"]
Madison	73 [2 7/8"]	138 [5 3/8"]
LULLU	73 [2 7/8"]	148 [5 3/4"]
Madison Flair	73 [2 7/8"]	148 [5 7/8"]
Just	78 [3 1/8"]	148 [5 7/8"]
LaFleur	83 [3 1/4"]	148 [5 7/8"]
Supernova	83 [3 1/4"]	148 [5 7/8"]
Tara	83 [3 1/4"]	148 [5 7/8"]
Vaia	83 [3 1/4"]	148 [5 7/8"]
MEM	108 [4 1/4"]	148 [5 7/8"]
CL.1	108 [4 1/4"]	148 [5 7/8"]

**Flow rate chart**

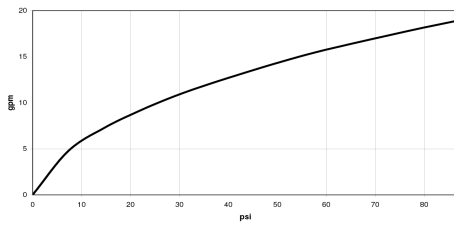

**Codes & Standards**

ASME  
A112.18.1/CSA  
B125.1

California Energy  
Commission  
(CEC)



## Concealed three-way diverter -

---

35 104 970


### Certificates

---

IAPMO\_4976 (3).

**Concealed three-way diverter -**

35 104 970

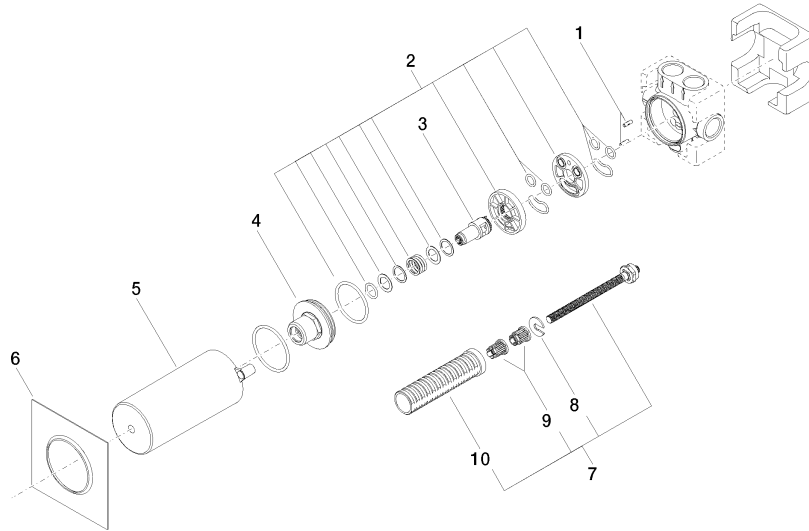

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
1	09 31 11 151 90	pin	2	2
2	90 30 11 085 00 90	set	1	2
3	09 29 06 025 90	spindle	1	2
4	09 21 02 124 90	lid	1	2
5	09 21 02 125 90	cap	1	2
6	09 14 03 109 90	seal	1	2
7	90 18 40 077 00 90	spindle	1	2
8	09 16 01 026 90	ring	1	2
9	90 12 12 002 00 90	fixing cap	2	2
10	90 18 40 077 01 90	spindle	1	2