

35 615 970



- concealed rough parts
- Rain panel with 2 different spray modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate I/min (at 3 bar)


  TEMPEST RAIN: Natural rain, max. flow rate 5
- l/min (at 3 bar)

  ◆ Ceiling installation enclosure 1356 x 1356 x 290 mm
- Opening diameter 1252 mm
- Ceiling construction with adequate structural strength for the permanent attachment of the device (weight: 57.5 kg / 127 lbs. (US)). M8 threaded bolts (minimum strength: 2000 N) are required to secure the ceiling module

To be provided by the customer. Zigbee Gateway!




35 615 970





35 615 970

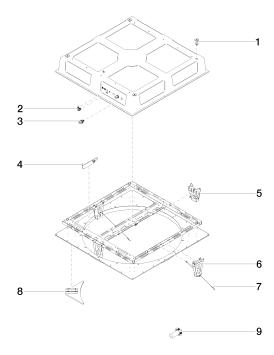



35 615 970

#### **Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
	04 24 03 287 02 90	fixing set	17	60