

35 860 970



- red brass, lead-free
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 1x female thread 1/2" outlet for wall spout

12 880 970 90

- 1x female thread 1/2" outlet
- 2x dust cover
- anti-water packing
- soundproofing
- gauge 100 mm

Rough can be rotated to position the lever on top or to the left of the spout.

#### Recommended miscellaneous

### **Extension 20 mm -** 12 869 970 90

PO B

6

•Not suitable for combining with META PURE (36 86X 664-FF).

Not for combination with exposed trim parts 36 86X 664-FF0010

### Recommended miscellaneous

Adapter for reversed water

connections -

•Not suitable for combining with META PURE (36 86X 664-FF).

### Recommended miscellaneous

Extension 20 mm -

**nm -** 12 870 970 90




•Can only be combined with exposed trim parts 36 86X 664-FF.




#### 35 860 970

mm [inches]



### Flow rate chart



### Codes & Standards

**ASME** A112.18.1/CSA B125.1




35 860 970

### Certificates

IAPMO\_N-4976 (2). IAPMO\_6397 (2). IAPMO\_4976 (1).



35 860 970

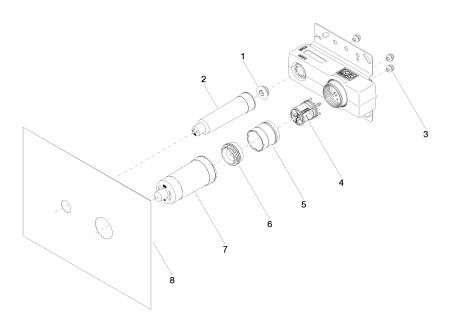

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 31 20 006 00 90	plug	1	2
2	09 21 02 182 90	сар	1	2
3	90 23 01 091 00 90	set	3	2
4	90 31 20 107 00 90	plug	1	2
5	90 17 01 238 00 90	sleeve	1	2
6	90 24 04 349 00 90	threaded connector	1	2
7	09 21 02 176 90	сар	1	60
8	04 14 03 074 01 90	gasket kit	1	2