

LISSÉ Concealed thermostat with one function volume control - Chrome

LISSÉ

36 425 845 Product version from 3/9/2016 to 8/24/2020



- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset

	Chrome	36 425 845-00 0010
	Brushed Platinum	36 425 845-06 0010
	Dark Chrome	36 425 845-19 0010
	Brushed Light Gold	36 425 845-27 0010
	Matte Black	36 425 845-33 0010
	Brushed Chrome	36 425 845-93 0010
	Brushed Dark Platinum	36 425 845-99 0010

Required miscellaneous



Concealed thermostat for one- and two-way outlets - 35 426 970-90 0010
 • max. recess depth 136 mm
 • min. recess depth 80 mm

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

mm [inches]

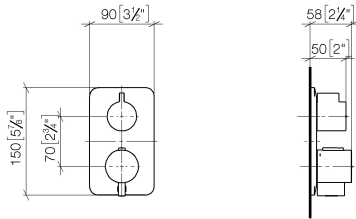

Codes & Standards

ADA

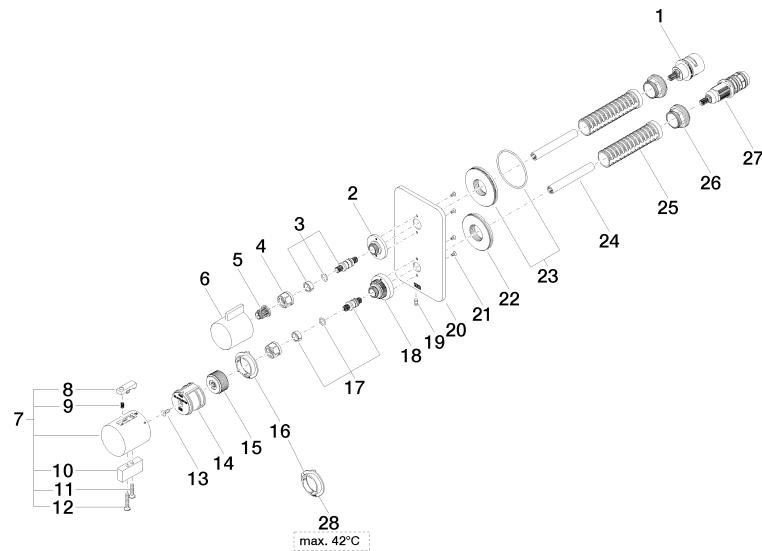

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
18	09 12 12 051-00	base	1.00	10
23	90 30 01 190 00 90	disc	1.00	2
20	09 11 02 302-00	plate	1.00	10
9	90 16 02 027 00 90	spring	1.00	2
12	09 30 30 160-00	screw	1.00	10
11	09 30 30 159-00	screw	1.00	10
5	90 12 12 002 00 90	fixing cap	1.00	2
2	09 12 12 053-00	base	1.00	10
15	09 12 12 054 90	base	1.00	2
16	09 28 10 190 90	regulator	1.00	2
21	09 30 30 157 90	screw	4.00	2
6	09 20 67 006-00	handle	1.00	10
28	09 28 10 189 90	regulator	1.00	2
7	04 17 33 006 00-00	handle	1.00	60
27	90 15 02 013 00 90	cartridge	1.00	2
19	09 31 11 134 90	pin	1.00	2
10	09 20 33 006-00	handle	1.00	10
26	09 24 04 257 90	nut	2.00	2
22	09 30 01 296 90	disc	1.00	2
1	90 90 03 166 00 90	top	1.00	2
13	90 30 30 124 00 90	screw	1.00	2
3	04 29 06 111 01-00	spindle	1.00	10
4	90 23 30 023 00 90	nut	2.00	2
24	90 23 01 124 00 90	sleeve	2.00	2
25	90 18 40 077 01 90	spindle	2.00	2
17	04 29 06 024 01-00	spindle	1.00	10
14	90 12 12 052 00 90	base	1.00	2
8	90 21 33 011 00-13	handle	1.00	2