















## Concealed thermostat with two function volume control - Dark Chrome

SERIES SPECIFIC

36 426 970



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- single flow function only

	Dark Chrome	36 426 970-19 0010
	Chrome	36 426 970-00 0010
	Brushed Platinum	36 426 970-06 0010
	Platinum	36 426 970-08 0010
	Light Gold	36 426 970-26 0010
	Brushed Light Gold	36 426 970-27 0010
	Brushed Durabronze (23kt Gold)	36 426 970-28 0010
	Matte Black	36 426 970-33 0010
	Brushed Dark Brass	36 426 970-39 0010
	Brushed Bronze	36 426 970-42 0010
	Brushed Champagne (22kt Gold)	36 426 970-46 0010
	Champagne (22kt Gold)	36 426 970-47 0010
	Brushed Chrome	36 426 970-93 0010
	Brushed Dark Platinum	36 426 970-99 0010

### Required miscellaneous



**Concealed thermostat for one- and two-way outlets -**  
 • max. recess depth 136 mm  
 • min. recess depth 80 mm

35 426 970-90 0010

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -**

12 340 970 90

### Required miscellaneous




**xGRID Installation track 555 mm -**

12 360 970 90

36 426 970

mm [inches]

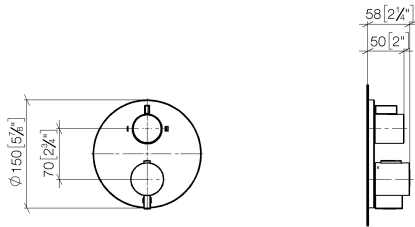

Codes & Standards

ADA

ASME A112.18.1

California Energy  
Commission  
(CEC)

cUPC

Certificates and sustainability

IAPMO\_4976 (

36 426 970

