







## Concealed thermostat with three function volume control - Brushed Bronze

SERIES SPECIFIC

36 428 970 Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- single flow function only

	Brushed Bronze	36 428 970-42 0010
	Chrome	36 428 970-00 0010
	Brushed Platinum	36 428 970-06 0010
	Platinum	36 428 970-08 0010
	Dark Chrome	36 428 970-19 0010
	Light Gold	36 428 970-26 0010
	Brushed Light Gold	36 428 970-27 0010
	Brushed Durabrass (23kt Gold)	36 428 970-28 0010
	Matte Black	36 428 970-33 0010
	Brushed Champagne (22kt Gold)	36 428 970-46 0010
	Champagne (22kt Gold)	36 428 970-47 0010
	Brushed Chrome	36 428 970-93 0010
	Brushed Dark Platinum	36 428 970-99 0010

### Required miscellaneous



<b>Concealed thermostat for three-way outlets -</b>	35 428 970-90 0010
• min. recess depth 80 mm	
• max. recess depth 136 mm	

### Recommended miscellaneous




<b>xGRID Attachment set for integrating in the dry wall construction -</b>	12 340 970 90
--	---------------

### Required miscellaneous



<b>xGRID Installation track 555 mm -</b>	12 360 970 90
--	---------------

mm [inches]

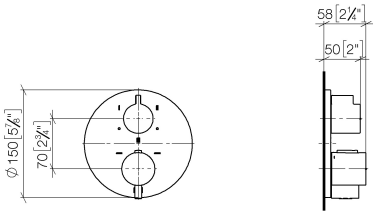

Codes & Standards			
ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC

Certificates and sustainability
IAPMO_4976 (

