

# WATER POINTS Concealed body spray FlowReduce - Brushed Durabronz (23kt Gold)

IMO

36 515 979



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system
- cover plate 120 x 120 mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS 1304001

**Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm**

Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm

|  |                               |               |
|--|-------------------------------|---------------|
|  | Brushed Durabronz (23kt Gold) | 36 515 979-28 |
|  | Chrome                        | 36 515 979-00 |
|  | Brushed Platinum              | 36 515 979-06 |
|  | Platinum                      | 36 515 979-08 |
|  | Dark Chrome                   | 36 515 979-19 |
|  | Light Gold                    | 36 515 979-26 |
|  | Brushed Light Gold            | 36 515 979-27 |
|  | Matte Black                   | 36 515 979-33 |
|  | Brushed Bronze                | 36 515 979-42 |
|  | Brushed Champagne (22kt Gold) | 36 515 979-46 |
|  | Champagne (22kt Gold)         | 36 515 979-47 |
|  | Brushed Chrome                | 36 515 979-93 |
|  | Brushed Dark Platinum         | 36 515 979-99 |

## Required miscellaneous



**WATER POINTS Adapter plate -** 12 305 970 90  
 • adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.

## Required miscellaneous



**Concealed wall installation box -** 35 205 970-90 0010  
 • max. recess depth 110 mm  
 • min. recess depth 85 mm

## Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

## Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90


# WATER POINTS Concealed body spray FlowReduce - Brushed Durabronz (23kt Gold)

IMO


36 515 979  
mm [inches]

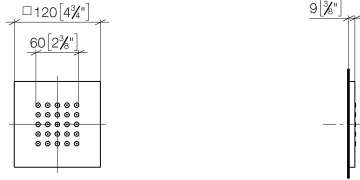

Flow rate chart

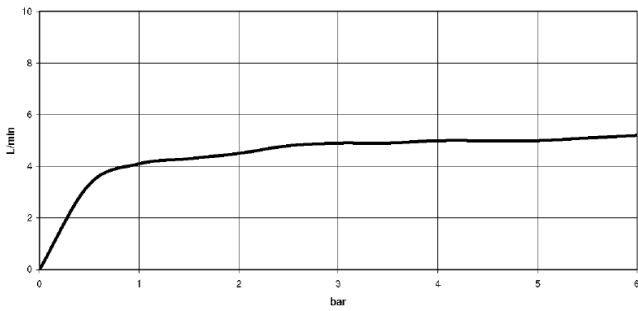

Trajectory diagram

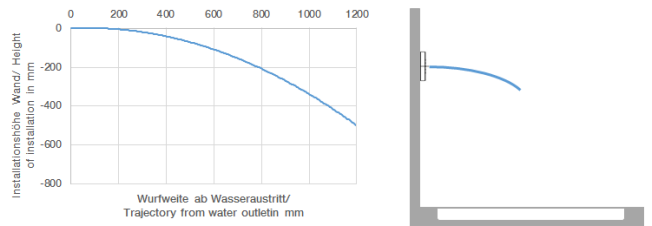

## Codes & Standards

ASME  
A112.18.1/CSA  
B125.1

Scottish Water  
Byelaws

California Energy  
Commission  
(CEC)

UK Water Supply  
Regulations

DIN 4109

Ü-Zeichen

ISO 3822



## WATER POINTS Concealed body spray FlowReduce - Brushed Durabronz (23kt Gold)

---

IMO

36 515 979

Certificates

---

WRAS\_1304


LGA\_18

# WATER POINTS Concealed body spray FlowReduce - Brushed Durabronz (23kt Gold)

IMO

36 515 979

**Product version from 4/1/2024**

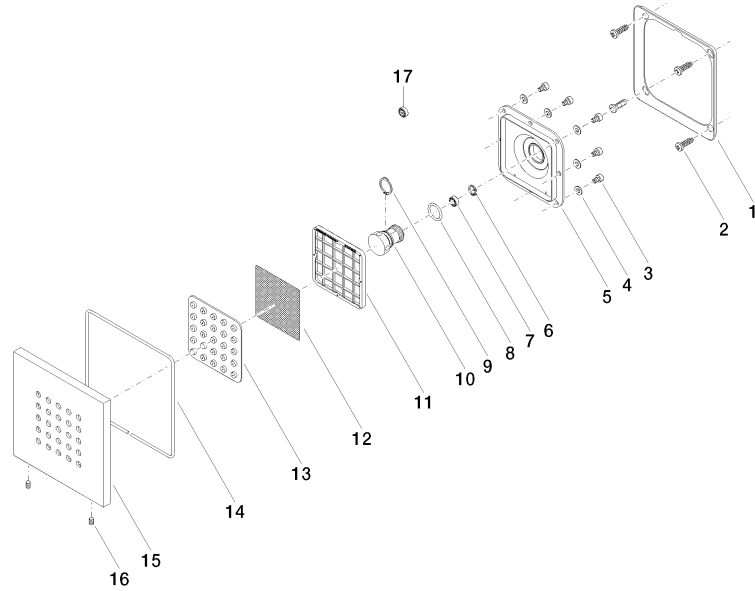



WATER POINTS Concealed body spray FlowReduce - Brushed Durabrass  
(23kt Gold)

IMO

36 515 979

Spare parts list

Product version from 4/1/2024

| No. | Item Number     | Name   | Quantity used | Delivery time |
|-----|-----------------|--------|---------------|---------------|
|     | 09 28 01 024 90 | holder | 34            | 2             |