

META META SLIM Wall-mounted single-lever basin mixer without pop-up waste - Matte Black

META

36 867 662


Product version from 7/1/2023



- 125mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter single-lever mixer 57 mm
- hole diameter spout 35 mm
- rosette for single-lever mixer Ø 78mm
- rosette for spout Ø 60mm
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Matte Black	36 867 662-33 0010
	Chrome	36 867 662-00 0010
	Brushed Platinum	36 867 662-06 0010
	Light Gold	36 867 662-26 0010
	Brushed Light Gold	36 867 662-27 0010
	Brushed Bronze	36 867 662-42 0010
	Brushed Champagne (22kt Gold)	36 867 662-46 0010
	Champagne (22kt Gold)	36 867 662-47 0010
	Brushed Chrome	36 867 662-93 0010
	Brushed Dark Platinum	36 867 662-99 0010


Required miscellaneous

	Concealed wall-mounted single-lever mixer -	35 860 970-90 0010
	<ul style="list-style-type: none"> •min. recess depth 80 mm •max. recess depth 95 mm •Rough can be rotated to position the lever on top or to the left of the spout. 	

META META SLIM Wall-mounted single-lever basin mixer without pop-up waste - Matte Black

META

36 867 662 Product version from 7/1/2023
mm [inches]

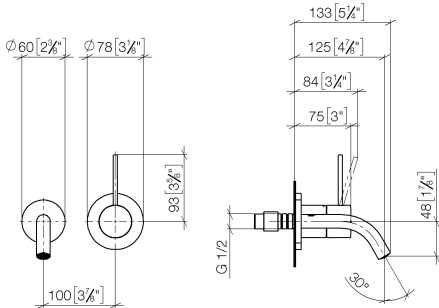

Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
EPA WaterSense	NSF372	NSF61	WaterSense




Certificates and sustainability

IAPMO_N-4976	IAPMO_6397	IAPMO_4976 (IAPMO_8834
--------------	------------	--------------	------------

META META SLIM Wall-mounted single-lever basin mixer without pop-up waste - Matte Black

META

36 867 662 Product version from 7/1/2023

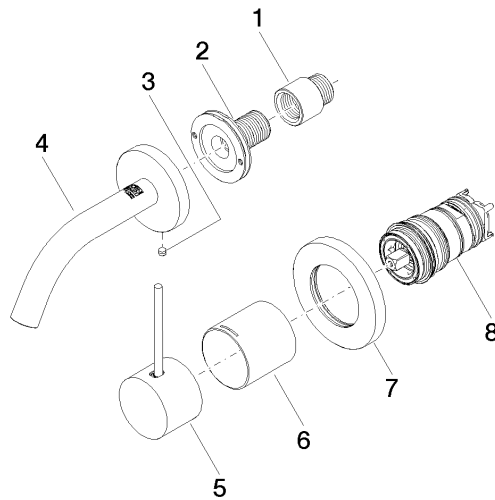

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	90 20 66 022 00-33	handle	1.00	30
8	90 15 05 044 02 90	cartridge	1.00	2
4	90 28 22 363 00-33	spout	1.00	30
2	90 24 03 280 00 90	nipple	1.00	2
1	09 24 03 072 10 90	nipple	1.00	2
7	90 27 62 011 00-33	rosette	1.00	30
6	09 11 02 336-33	sleeve	1.00	30
3	09 31 11 112 90	pin	1.00	60