

41 750 979



- exposed trim parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 6.8 l/min (at 3 bar)
 TEMPEST RAIN: Natural rain, max. flow rate 6.8
- TEMPEST RAIN: Natural rain, max. flow rate 6.8 l/min (at 3 bar)
 DIAMOND RAIN: Ring of rain, max. flow rate 6.8
- DIAMOND RAIN: Ring of rain, max. flow rate 6.8 l/min (at 3 bar)
 Outer diameter: 605 mm, opening diameter: 465
- Outer diameter: 605 mm, opening diameter: 46 mm
- Weight: 6 kg
- central LED Spot 3000 K
- Protection rating IP67
- Not suitable for use in a steam room.

To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included).

Required miscellaneous




SERIES-VARIOUS AQUAHALO35 750 970-06Concealed ceiling installation box0010- Brushed Platinum0010• Oncealed rough parts-• Pre-assembly kit for three-waydiverter included• Ceiling installation enclosure 605 x605 x 95 mm• Weight: 10 kg-• min. recess depth 110 mm


Brushed Platinum	41 750 979-06 0010
Chrome	41 750 979-00 0010
Matte Black	41 750 979-33 0010
Brushed Champagne (22kt Gold)	41 750 979-46 0010
Champagne (22kt Gold)	41 750 979-47 0010



41 750 979



Flow rate chart






41 750 979

Product version from 4/1/2024

Parts for other finishes can be found here: Chrome

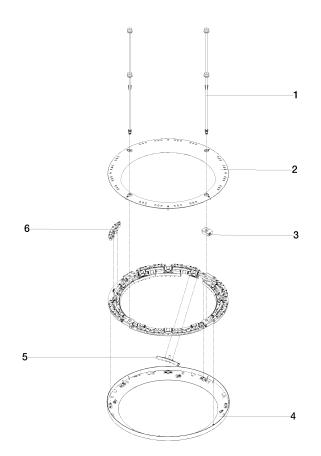



41 750 979

Spare parts list

Product version from 4/1/2024

No.	Item Number	Name	Quantity used	Delivery time
	90 28 22 605 01-06	distributor	13	10