

## UP-Wandwinkel -

---

35 085 970 90 Produktversion ab 3/7/2023




- DR-Messing, bleifrei
- Anschluss IG 1/2"
- 1x Abgang IG 1/2"
- Rohbau-Schutzhaube
- Wasserschutz-Manschette
- Schalldämmung

Für Wandausläufe und Wandabgangsbögen mit 1/2" Anschluss.

# UP-Wandwinkel -

35 085 970 90    Produktversion ab 3/7/2023

mm [inches]

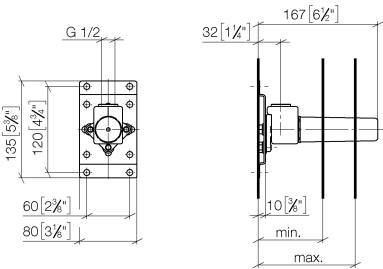

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

## Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------


Ü-Zeichen

## Zertifikate

LGA_29	WRAS_240502
--------	-------------

# UP-Wandwinkel -

35 085 970 90    Produktversion ab 3/7/2023

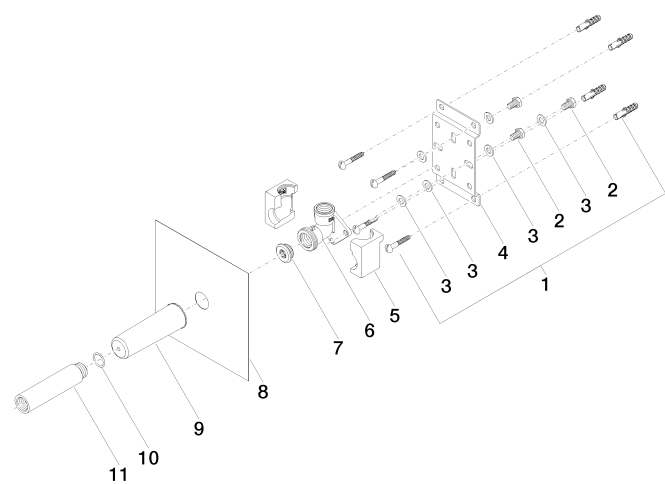

## Ersatzteilstückliste

Nr.	Artikelnummer	Benennung	Verbaumenge	Lieferzeit
1	04 30 31 024 01 90	Befestigungssatz	2	2
2	09 30 30 152 90	Schraube	3	2
3	09 30 11 139 90	Scheibe	6	2
4	09 17 20 094 90	Halter	1	2
5	09 11 11 036 90	Zubehoer	1	2
6	09 11 03 041 10 90	Anschluss	1	2
7	04 31 20 006 00 90	Stopfen	1	2
8	04 14 03 072 01 90	Dichtungssatz	1	2
9	09 21 02 102 90	Kappe	1	2
10	90 14 10 010 00 90	Dichtung	1	2
11	09 24 03 169 10 90	Adapter	1	2