

## WATER SHEET Cascade spout for wall mounting - Dark Chrome

SERIES-VARIOUS

13 415 979



- CASCADE, max. flow rate 26.5 l/min (at 3 bar)
- Function from: l/min

### Technical data:

- cover plate 240 x 60 mm
- 150mm projection
- 1/2" connection
- plug-link mounting

	Dark Chrome	13 415 979-19
	Chrome	13 415 979-00
	Brushed Platinum	13 415 979-06
	Platinum	13 415 979-08
	Light Gold	13 415 979-26
	Brushed Light Gold	13 415 979-27
	Brushed Durabronze (23kt Gold)	13 415 979-28
	Matte Black	13 415 979-33
	Brushed Dark Brass	13 415 979-39
	Brushed Bronze	13 415 979-42
	Brushed Champagne (22kt Gold)	13 415 979-46
	Champagne (22kt Gold)	13 415 979-47
	Brushed Chrome	13 415 979-93
	Brushed Dark Platinum	13 415 979-99

### Recommended miscellaneous



#### Concealed wall elbow -

- max. recess depth 163 mm
- min. recess depth 90 mm

35 085 970 90

### Recommended miscellaneous




#### Concealed wall elbow -

- max. recess depth 163 mm
- min. recess depth 90 mm


35 085 970 90

13 415 979


mm [inches]

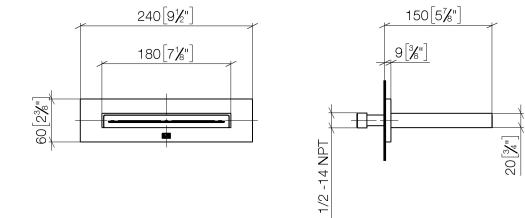

Flow rate chart

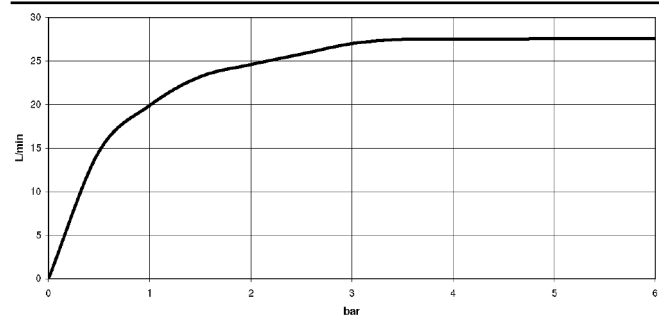

Trajectory diagram

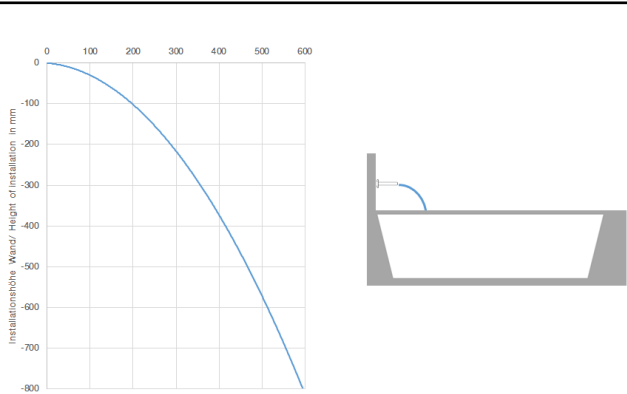

Codes & Standards

ASME A112.18.1	cUPC	Scottish Water Byelaws	UK Water Supply Regulations
----------------	------	------------------------	-----------------------------



## WATER SHEET Cascade spout for wall mounting - Dark Chrome

SERIES-VARIOUS

13 415 979

Certificates and sustainability

WRAS\_2306

IAPMO\_4976

13 415 979

