

WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

SERIES-VARIOUS

13 425 979



- PEARLSTREAM
- Max. flow rate 9.5 l/min (at 3 bar)
- Function from: l/min

Technical data:

- plate 240 mm x 60 mm
- 22mm projection
- connection 1/2", for shortening
- plug-link mounting

	Dark Chrome	13 425 979-19
	Chrome	13 425 979-00
	Brushed Platinum	13 425 979-06
	Platinum	13 425 979-08
	Light Gold	13 425 979-26
	Brushed Light Gold	13 425 979-27
	Brushed Durabronze (23kt Gold)	13 425 979-28
	Matte Black	13 425 979-33
	Brushed Dark Brass	13 425 979-39
	Brushed Bronze	13 425 979-42
	Brushed Champagne (22kt Gold)	13 425 979-46
	Champagne (22kt Gold)	13 425 979-47
	Brushed Chrome	13 425 979-93
	Brushed Dark Platinum	13 425 979-99

Recommended miscellaneous



Concealed wall elbow -

- max. recess depth 163 mm
- min. recess depth 90 mm

35 085 970 90

Recommended miscellaneous



Concealed wall elbow -


- max. recess depth 163 mm
- min. recess depth 90 mm

35 085 970 90


WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

SERIES-VARIOUS


13 425 979
mm [inches]

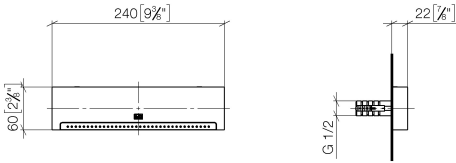

Flow rate chart

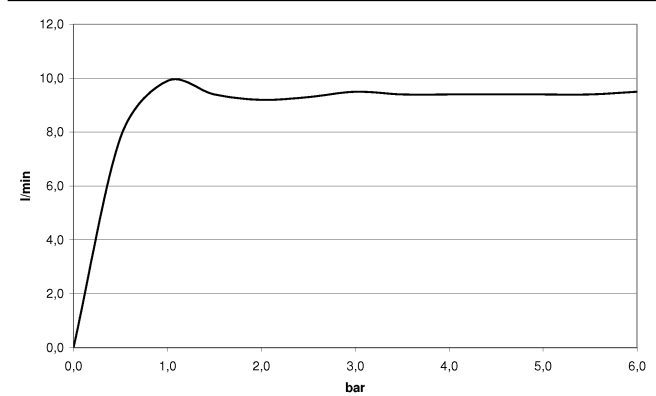

Trajectory diagram

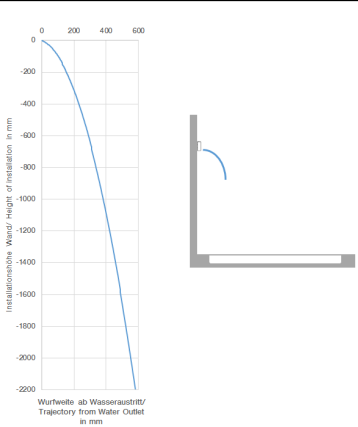

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Dark
Chrome

SERIES-VARIOUS

13 425 979
Certificates and sustainability

LGA_19 IAPMO_4976

WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

SERIES-VARIOUS

13 425 979

