

Hand shower set with integrated shower holder - Platinum

SERIES SPECIFIC

27 802 660 Product version from 7/1/2022



- COMPACT RAIN, max. flow rate 8 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

| | | |
|---|--------------------------------|--------------------|
|  | Platinum | 27 802 660-08 0050 |
|  | Chrome | 27 802 660-00 0050 |
|  | Brushed Platinum | 27 802 660-06 0050 |
|  | Dark Chrome | 27 802 660-19 0050 |
|  | Light Gold | 27 802 660-26 0050 |
|  | Brushed Light Gold | 27 802 660-27 0050 |
|  | Brushed Durabronze (23kt Gold) | 27 802 660-28 0050 |
|  | Matte Black | 27 802 660-33 0050 |
|  | Brushed Dark Brass | 27 802 660-39 0050 |
|  | Brushed Bronze | 27 802 660-42 0050 |
|  | Brushed Champagne (22kt Gold) | 27 802 660-46 0050 |
|  | Champagne (22kt Gold) | 27 802 660-47 0050 |
|  | Brushed Chrome | 27 802 660-93 0050 |
|  | Brushed Dark Platinum | 27 802 660-99 0050 |

Recommended miscellaneous


Concealed wall elbow -

35 085 970 90





- max. recess depth 163 mm
- min. recess depth 90 mm

mm [inches]

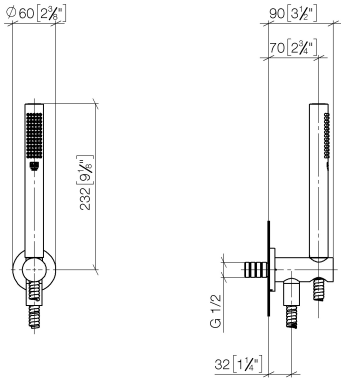

Flow rate chart

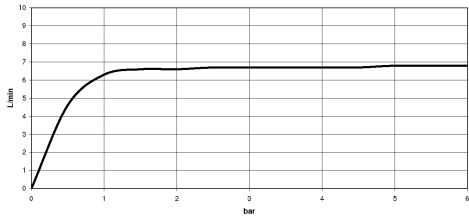

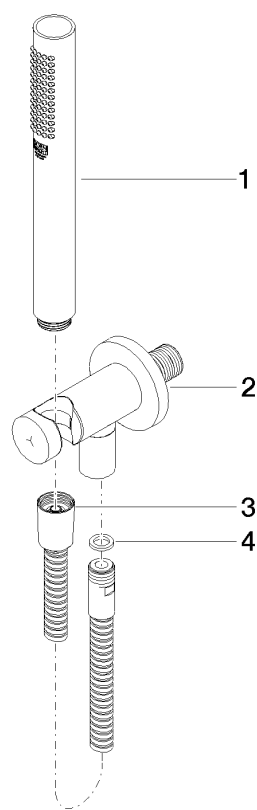

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|---|---------------|---------------|
| 2 | 28 490 660-08 | Wall elbow with integrated shower holder - Platinum | 1.00 | 40 |
| 3 | 90 30 02 072 00-08 | Metal shower hose 1/2" x 3/8" x 1250 mm - Platinum | 1.00 | 40 |
| 4 | 90 14 20 026 00 90 | seal | 1.00 | 2 |
| 1 | 90 12 11 140 41-08 | shower | 1.00 | 40 |