

Hand shower set with individual rosettes - Matte Black

IMO

27 808 980



Fits: IMO, MEM, CL.1, CYO

- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- rosette for wall elbow 60 x 60mm
- rosette for shower holder 60 x 60mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

	Matte Black	27 808 980-33 0050
	Chrome	27 808 980-00 0050
	Brushed Platinum	27 808 980-06 0050
	Platinum	27 808 980-08 0050
	Dark Chrome	27 808 980-19 0050
	Brushed Durabronze (23kt Gold)	27 808 980-28 0050
	Brushed Champagne (22kt Gold)	27 808 980-46 0050
	Champagne (22kt Gold)	27 808 980-47 0050
	Brushed Chrome	27 808 980-93 0050
	Brushed Dark Platinum	27 808 980-99 0050

Recommended miscellaneous



Concealed wall elbow -

35 085 970 90


- max. recess depth 163 mm
- min. recess depth 90 mm

Hand shower set with individual rosettes - Matte Black

IMO

27 808 980


mm [inches]

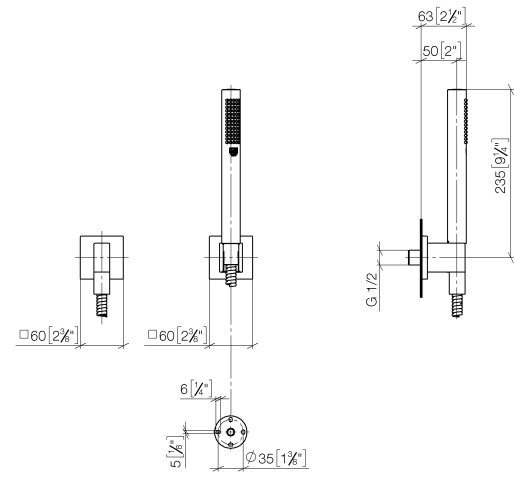

Flow rate chart



27 808 980

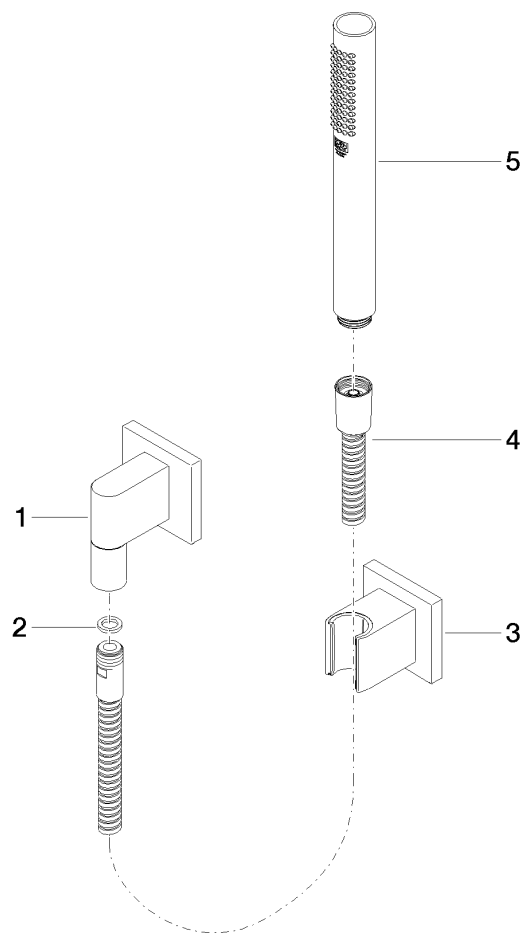

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 450 980-33	Wall elbow - Matte Black	1	30
2	90 14 20 026 00 90	seal	1	2
3	28 050 980-33	Wall bracket - Matte Black	1	30
4	90 30 02 072 00-33	Metal shower hose 1/2" x 3/8" x 1250 mm - Matte Black	1	30
5	90 12 11 140 30-33	shower	1	30