




28 015 626




- normal flow
- with anti-scale system
- spray head Ø 100mm
- 1/2" connection
- max. flow 6.8 l/min
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

|   |                |                    |
|---|----------------|--------------------|
|  | Chrome         | 28 015 626-00 0010 |
|  | Matte Black    | 28 015 626-33 0010 |
|  | Brushed Chrome | 28 015 626-93 0010 |

28 015 626

mm [inches]

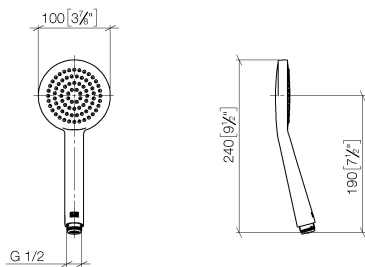

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen

Certificates and sustainability

LGA\_29