




28 019 626




- normal flow
- with anti-scale system
- 1/2" connection
- max. flow 15 l/min
- inherently safe from back flow


	Brushed Chrome	28 019 626-93
	Chrome	28 019 626-00
	Matte Black	28 019 626-33

28 019 626

mm [inches]



Flow rate chart

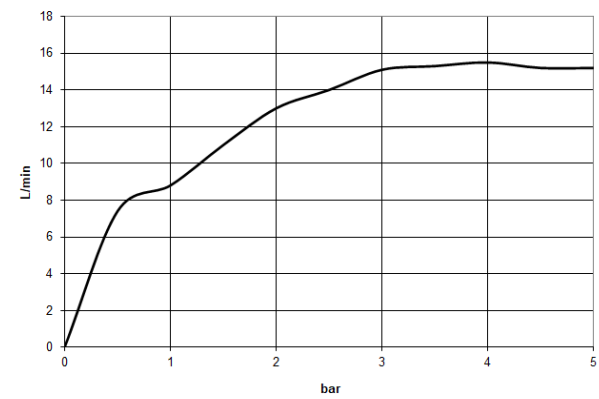

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



EDITION PRO Hand shower - Brushed Chrome

EDITION PRO

28 019 626

Certificates and sustainability

LGA_29