

Rain shower for surface-mounted ceiling installation with light 300 mm - Chrome

TARA

28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
  - PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
  - PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
  - Distance to ceiling from bottom edge of shower 40 mm
  - with anti-scale system
  - central LED Spot 3000 K
  - Provided by customer: Light switch
  - For simultaneous control of the jet types, we recommend the xTool thermostat module
  - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
  - Not suitable for use in a steam room.
- Three-way diverter trim is sold separately**
- Three-way diverter trim is sold separately

|  |                                |                    |
|--|--------------------------------|--------------------|
|  | Chrome                         | 28 032 970-00 0050 |
|  | Brushed Platinum               | 28 032 970-06 0050 |
|  | Platinum                       | 28 032 970-08 0050 |
|  | Dark Chrome                    | 28 032 970-19 0050 |
|  | Light Gold                     | 28 032 970-26 0050 |
|  | Brushed Light Gold             | 28 032 970-27 0050 |
|  | Brushed Durabronze (23kt Gold) | 28 032 970-28 0050 |
|  | Matte Black                    | 28 032 970-33 0050 |
|  | Brushed Bronze                 | 28 032 970-42 0050 |
|  | Brushed Champagne (22kt Gold)  | 28 032 970-46 0050 |
|  | Champagne (22kt Gold)          | 28 032 970-47 0050 |
|  | Brushed Chrome                 | 28 032 970-93 0050 |
|  | Brushed Dark Platinum          | 28 032 970-99 0050 |


Required miscellaneous




- Concealed ceiling installation box for surface-mounted ceiling installation with light -** 35 042 970 90
- min. recess depth 90 mm
  - max. recess depth 115 mm
  - 2x female thread 1/2" connections
  - Input 100-240V AC 50-60Hz
  - concealed rough parts
  - Output 350 mA SELV / Class II
  - Provided by customer: Light switch

Rain shower for surface-mounted ceiling installation with light 300 mm - Chrome
TARA


28 032 970  
mm [inches]

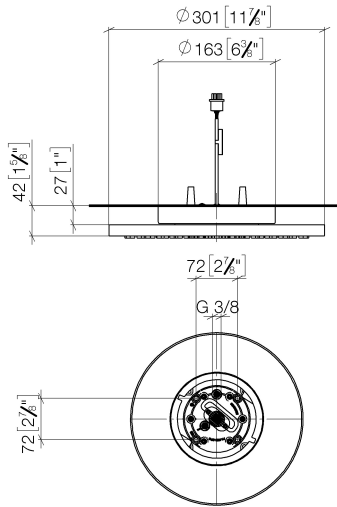

Flow rate chart

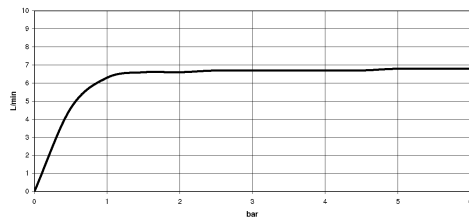

28 032 970

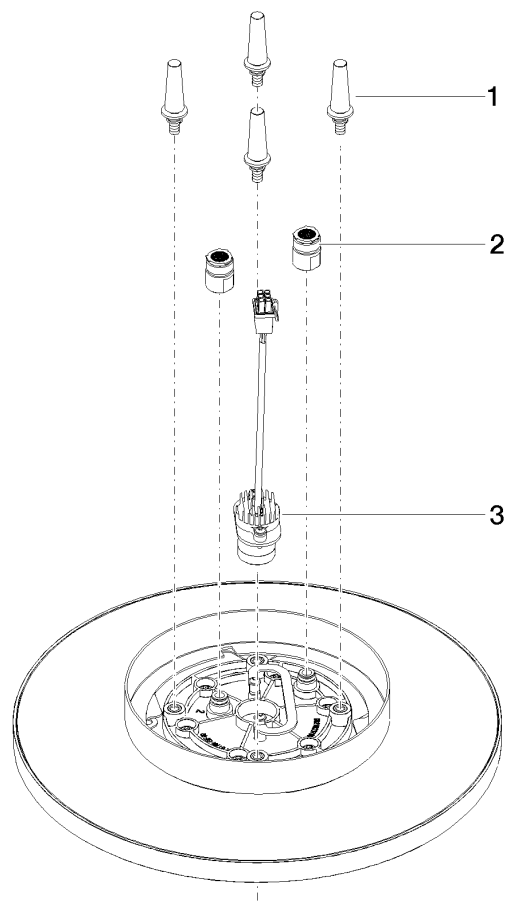

Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1   | 90 17 20 263 00 90 | fixing set             | 1             | 2             |
| 2   | 90 24 03 309 02 90 | connection             | 2             | 2             |
| 3   | 90 10 01 225 00 90 | electronic accessories | 1             | 2             |