

# Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 7/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system

**Technical data:**

- min. recess depth 137 mm

**Ceiling module power supply**

- 12V DC (CV)

**electrical:**

**Ambient lighting**

**Spot lighting**

- LED coloured light RGBW
- LED coloured light RGBW

**Activation**

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway
- Bulbs protected against splashing water

**Environment**

**Planning tips:**

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

**Three-way diverter trim is sold separately**

Three-way diverter trim is sold separately

	Brushed Light Gold	28 034 970-27 0050
	Chrome	28 034 970-00 0050
	Brushed Platinum	28 034 970-06 0050
	Platinum	28 034 970-08 0050
	Dark Chrome	28 034 970-19 0050
	Light Gold	28 034 970-26 0050
	Brushed Durabronze (23kt Gold)	28 034 970-28 0050
	Matte Black	28 034 970-33 0050
	Brushed Dark Brass	28 034 970-39 0050
	Brushed Bronze	28 034 970-42 0050
	Brushed Champagne (22kt Gold)	28 034 970-46 0050
	Champagne (22kt Gold)	28 034 970-47 0050
	Brushed Chrome	28 034 970-93 0050
	Brushed Dark Platinum	28 034 970-99 0050

## Required miscellaneous




**Concealed ceiling installation box for recessed ceiling installation with light - 35 034 970 90**


- concealed rough parts
- flush-mounted reflection box Ø 360 mm RAL 9003 signal white
- recess depth 137mm
- 2x female thread " outlet
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC Gold


28 034 970 Product version from 7/1/2022  
mm [inches]

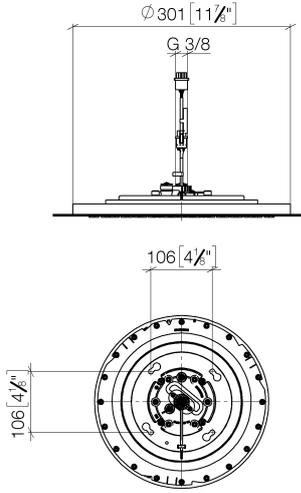

Flow rate chart

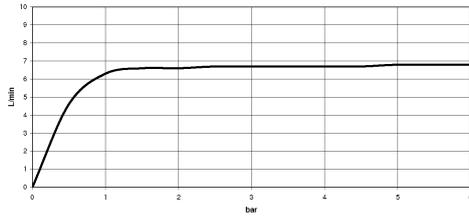

28 034 970 Product version from 7/1/2022

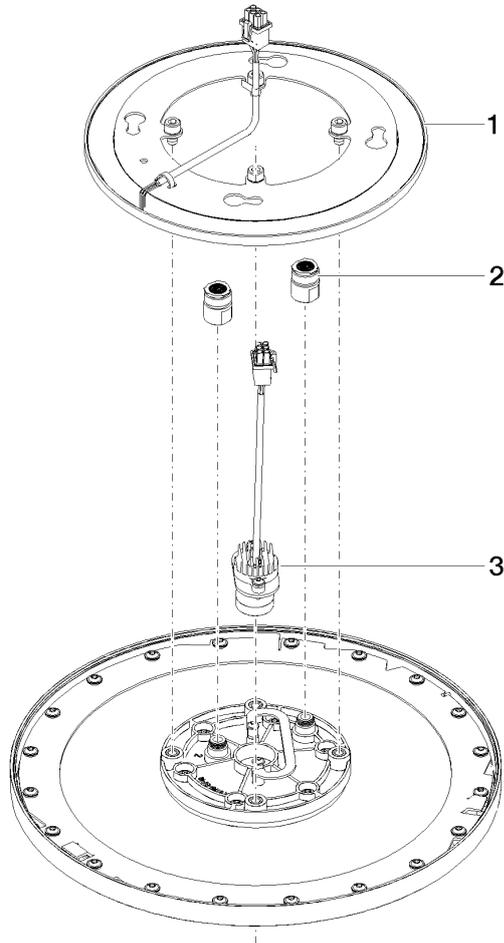

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
3	90 10 01 225 00 90	electronic accessories	1.00	2
1	90 10 01 221 00 90	electronic accessories	1.00	2
2	90 24 03 309 02 90	connection	1.00	2