

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold)

28 041 980 Product version from 7/1/2022



- rain shower 300 x 240mm
 - PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
 - PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
 - Distance to ceiling from bottom edge of shower 40 mm
 - with anti-scale system
 - For simultaneous control of the jet types, we recommend the xTool thermostat module
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Three-way diverter trim is sold separately**

Three-way diverter trim is sold separately

	Brushed Champagne (22kt Gold)	28 041 980-46 0050
	Chrome	28 041 980-00 0050
	Brushed Platinum	28 041 980-06 0050
	Platinum	28 041 980-08 0050
	Dark Chrome	28 041 980-19 0050
	Brushed Light Gold	28 041 980-27 0050
	Brushed Durabrass (23kt Gold)	28 041 980-28 0050
	Matte Black	28 041 980-33 0050
	Champagne (22kt Gold)	28 041 980-47 0050
	Brushed Chrome	28 041 980-93 0050
	Brushed Dark Platinum	28 041 980-99 0050

Required miscellaneous




Concealed ceiling installation box 35 041 970 90 with ceiling fixing -


- min. recess depth mm
- max. recess depth mm
- 2x female thread " outlet
- concealed rough parts

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold)

28 041 980 Product version from 7/1/2022
mm [inches]

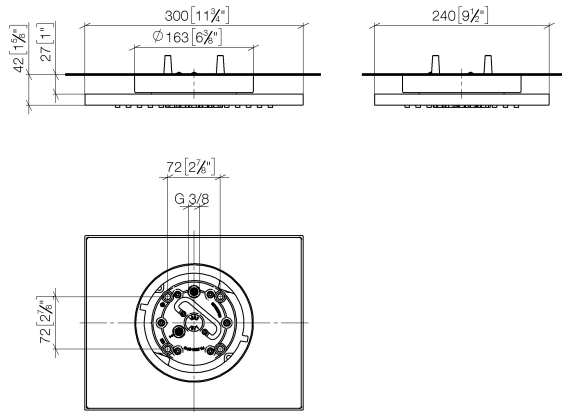


Flow rate chart

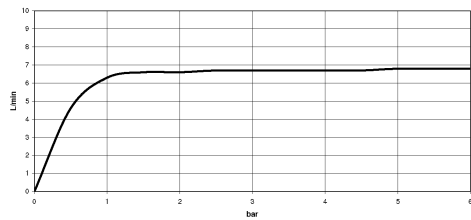

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold)

28 041 980
Product version from 7/1/2022

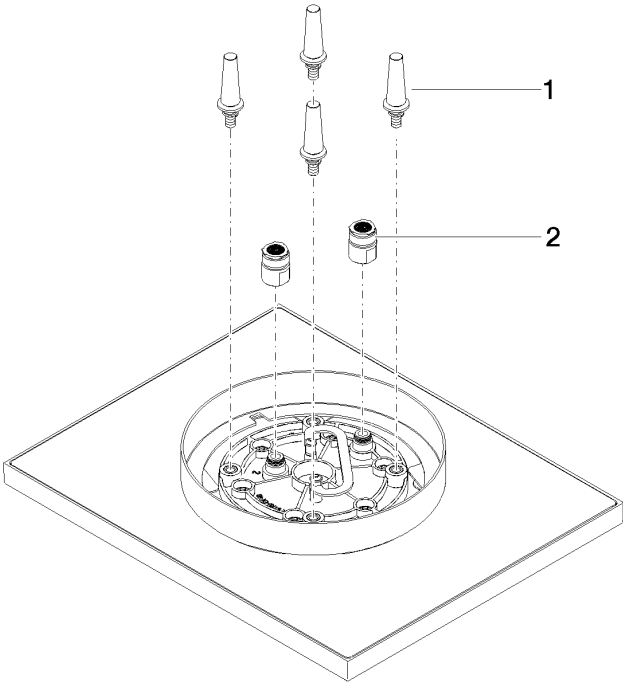

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	1	2