

## Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC Brushed Durabrand (23kt Gold)

28 042 980



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

### Ceiling module power supply

- 350mA (CC)

### Electric:

### Spot lighting

- Technology: LED, not dimmable
- LED colour temperature approx. 3000 K
- Provided by customer: Light switch
- Contains energy efficiency class bulbs
- Bulbs protected against splashing water

### Environment

### Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- WRAS

	Brushed Durabrand (23kt Gold)	28 042 980-28 0050
	Chrome	28 042 980-00 0050
	Brushed Platinum	28 042 980-06 0050
	Platinum	28 042 980-08 0050
	Dark Chrome	28 042 980-19 0050
	Matte Black	28 042 980-33 0050
	Brushed Champagne (22kt Gold)	28 042 980-46 0050
	Champagne (22kt Gold)	28 042 980-47 0050
	Brushed Chrome	28 042 980-93 0050
	Brushed Dark Platinum	28 042 980-99 0050

## Required miscellaneous




### Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light -

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 350 mA SELV / Class 2
- Provided by customer: Light switch

## Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC Brushed Durabrand (23kt Gold)

28 042 980

mm [inches]

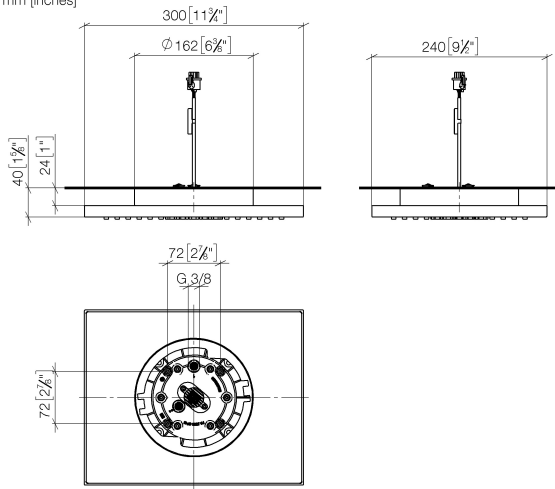

### Flow rate chart

