

Body spray without volume control FlowReduce - Brushed Light Gold

IMO

28 518 782



Fits: IMO, MEM, CL.1, CYO

- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- rain flow
- anti-scale system
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 5 l/min
- WRAS 1809018
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Light Gold	28 518 782-27
	Chrome	28 518 782-00 0050
	Brushed Platinum	28 518 782-06 0050
	Platinum	28 518 782-08 0050
	Dark Chrome	28 518 782-19 0050
	Brushed Light Gold	28 518 782-27 0050
	Brushed Durabrass (23kt Gold)	28 518 782-28 0050
	Matte Black	28 518 782-33 0050
	Brushed Champagne (22kt Gold)	28 518 782-46 0050
	Champagne (22kt Gold)	28 518 782-47 0050
	Brushed Chrome	28 518 782-93 0050
	Brushed Dark Platinum	28 518 782-99 0050

Recommended miscellaneous




Concealed wall elbow -

35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm

28 518 782

mm [inches]



Flow rate chart



Trajectory diagram



Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen




Body spray without volume control FlowReduce - Brushed Light Gold

IMO

28 518 782

Certificates

LGA_38

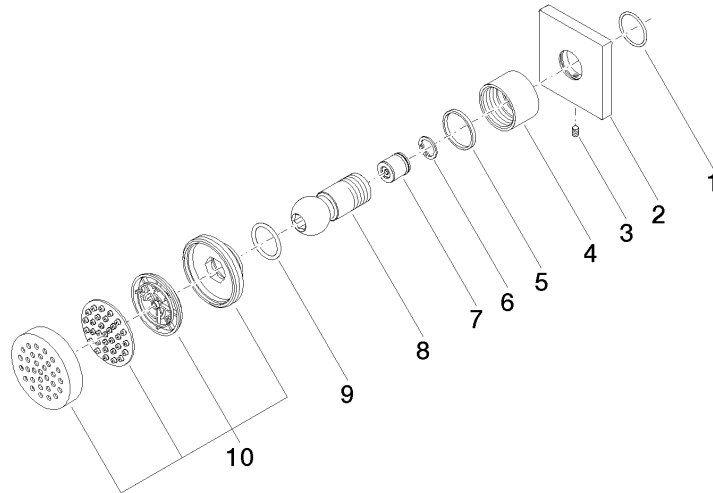



Spare parts list