















## Body spray without volume control - Platinum

## SERIES SPECIFIC

28 518 979 Product version from 7/1/2022



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 5 l/min (at 3 bar)
- with anti-scale system
- rosette Ø 55 mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Platinum	28 518 979-08 0050
	Chrome	28 518 979-00 0050
	Brushed Platinum	28 518 979-06 0050
	Dark Chrome	28 518 979-19 0050
	Light Gold	28 518 979-26 0050
	Brushed Light Gold	28 518 979-27 0050
	Brushed Durabronze (23kt Gold)	28 518 979-28 0050
	Matte Black	28 518 979-33 0050
	Brushed Dark Brass	28 518 979-39 0050
	Brushed Bronze	28 518 979-42 0050
	Brushed Champagne (22kt Gold)	28 518 979-46 0050
	Champagne (22kt Gold)	28 518 979-47 0050
	Brushed Chrome	28 518 979-93 0050
	Brushed Dark Platinum	28 518 979-99 0050

## Recommended miscellaneous

### Concealed wall elbow -

35 085 970 90




- max. recess depth 163 mm
- min. recess depth 90 mm


28 518 979 Product version from 7/1/2022

mm [inches]



Flow rate chart

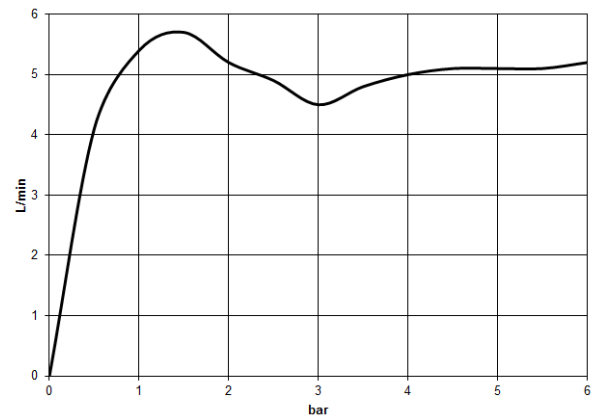

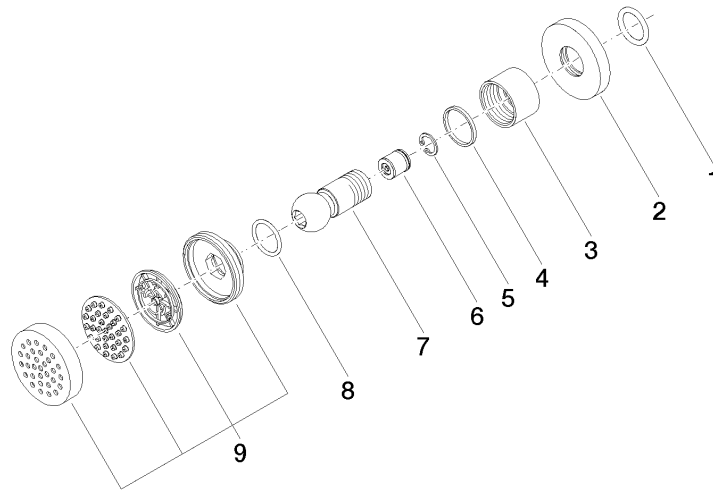

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
6	09 23 01 048 90	back-flow preventer	1.00	2
9	90 12 05 027 00-08	casing ( completely )	1.00	40
3	09 23 30 026-08	nut	1.00	40
7	09 21 40 016-08	connection	1.00	40
4	09 14 15 010 90	ring	1.00	2
5	09 16 01 014 90	ring	1.00	2
8	09 14 10 015 90	seal	1.00	2
1	90 14 10 026 00 90	seal	1.00	2
2	09 27 22 019-08	rosette	1.00	40