

META Wall-mounted valve cold water without pop-up waste - Light Gold

META

30 010 662



- 126mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 35 mm
- rosette Ø 60 mm
- max. flow 5.7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

| | | |
|--|-------------------------------|---------------|
|  | Light Gold | 30 010 662-26 |
|  | Chrome | 30 010 662-00 |
|  | Brushed Platinum | 30 010 662-06 |
|  | Dark Chrome | 30 010 662-19 |
|  | Brushed Light Gold | 30 010 662-27 |
|  | Matte Black | 30 010 662-33 |
|  | Brushed Bronze | 30 010 662-42 |
|  | Brushed Champagne (22kt Gold) | 30 010 662-46 |
|  | Champagne (22kt Gold) | 30 010 662-47 |
|  | Brushed Chrome | 30 010 662-93 |
|  | Brushed Dark Platinum | 30 010 662-99 |

Recommended miscellaneous

Concealed wall elbow -


35 085 970 90



- min. recess depth 90 mm
- max. recess depth 163 mm

30 010 662

mm [inches]

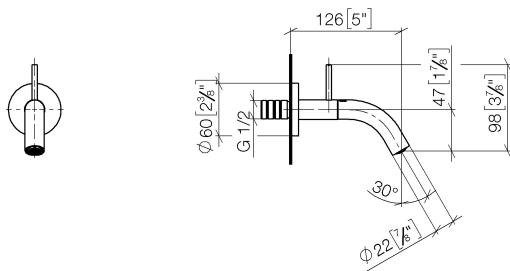

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



META Wall-mounted valve cold water without pop-up waste - Light Gold

META

30 010 662

Certificates

LGA_38

Product version from 5/1/2022





META Wall-mounted valve cold water without pop-up waste - Light Gold

META

30 010 662

Spare parts list

Product version from 5/1/2022

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--------|---------------|---------------|
| | 09 24 03 072 10 90 | nipple | 5 | 2 |