

27 802 892



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- 1/2" shower outlet
- rosette for wall elbow Ø 55mm
- rosette for shower holder Ø 55mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

	Chrome	27 802 892-00 0050
	Brushed Platinum	27 802 892-06 0050
	Platinum	27 802 892-08 0050
	Dark Chrome	27 802 892-19 0050
	Brushed Durabronze (23kt Gold)	27 802 892-28 0050
	Matte Black	27 802 892-33 0050
	Brushed Champagne (22kt Gold)	27 802 892-46 0050
	Champagne (22kt Gold)	27 802 892-47 0050
	Brushed Chrome	27 802 892-93 0050
	Brushed Dark Platinum	27 802 892-99 0050


Recommended miscellaneous



- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm

27 802 892


mm [inches]

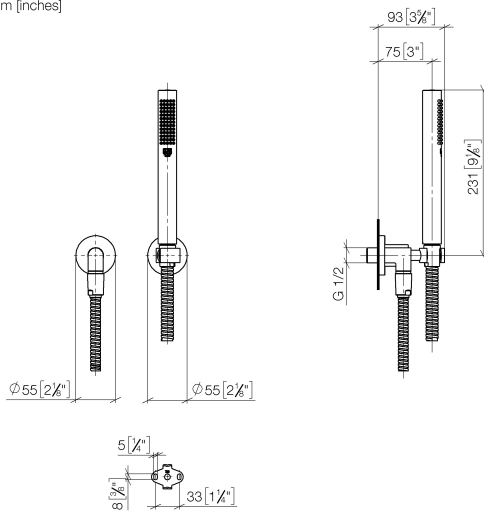

Flow rate chart



27 802 892

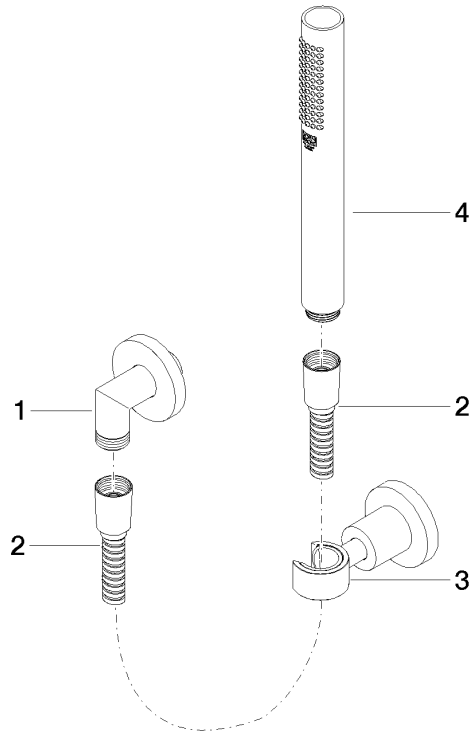

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 450 892-00	connection	1	60
2	28 104 970-00	Metal shower hose 1/2" x 1/2" x 1250 mm - Chrome	1	2
3	28 050 892-00	TARA Wall bracket - Chrome	1	10
4	90 12 11 140 30-00	shower	1	10